



Product Catalog

FLEXCO[®]
AMERICAN-MADE FLOORING

flexcofloors.com

Table of Contents

- 4 Coordinated Flooring Systems
- 4 FlexOne Pricing
- 5 Categories + Markets
- 6 Life Cycle Benefits

Rubber Flooring

- 10 FlexTones® Textured Rubber Tile
- 12 Evolving Styles® Creative Elements
- 14 Evolving Styles® Wood Elements
- 16 SpexTones™ Rubber Tile
- 18 FreeFlex® Rubber Tile
- 20 Tuflex® Force® Recycled Rubber Tile
- 22 Prime Sports™ Rubber Tile
- 24 FlexTuft® Recycled Rubber Tile
- 26 Repel™ Oil And Grease Resistant
- 28 IMO Rubber Flooring
- 30 Rubber Flooring [SPECS](#)
- 32 Sports Flooring/Multipurpose [SPECS](#)

Stair Treads

- 54 Distinct Designs Rubber Stair Treads
- 56 Vinyl Stair Treads
- 58 FlexTerior® Metal Stair Treads
- 60 Rubber Stair Treads [SPECS](#)
- 66 Vinyl Stair Treads [SPECS](#)
- 67 FlexTerior® Metal Treads [SPECS](#)
- 68 Stair Tread Accessories
- 69 Inserts + Strips

Accessories + Specs

- 88 Welding Beads Rubber + Vinyl
- 90 Subleveling Systems
- 92 Vinyl Flooring Accessories
- 94 Adhesives For Tile, Tread + Wall Base
- 96 Installation + Maintenance
- 98 ASTM
- 100 Xpress Flooring Options
- 101 Sample Requests Rubber + Vinyl
- 102 IMPACT Program

Vinyl Flooring

- 36 Natural Elements Premium Luxury Vinyl Tile Wood
- 38 Natural Elements Premium Luxury Vinyl Tile Stone
- 40 Delane® Solid Vinyl Tile
- 42 Geodesy® Solid Vinyl Tile
- 50 Vinyl Flooring [SPECS](#)

ESD flooring

- 46 ESD Static Control Rubber Flooring
- 48 Delane® ESD Static Control Vinyl Flooring
- 51 ESD Flooring [SPECS](#)

Wall Base

- 72 Wallflowers® Premium Rubber Wall Base
- 74 Wood Elements™ Wall Base
- 76 Base Sculptures™ Wall Base Systems
- 78 Base 2000™ Wall Base
- 80 Vinyl Wall Base
- 82 Health Design™ Wall Base
- 84 Wall Base [SPECS](#)
- 85 Corner Blocks [SPECS](#)
- 86 Base Sculptures™ + Corners [SPECS](#)



FLEXCO®
AMERICAN-MADE FLOORING

When you partner with FLEXCO®, you're working with a proven resilient flooring manufacturer that has been producing premium American-made flooring products for over 65 years. All of our flooring products, from tile and plank to tread, wall base and accessories are made in our U.S.-based manufacturing facilities. We source safe and sustainable raw materials and produce the highest quality products to meet your stringent needs.

Coordinated

F L O O R I N G S Y S T E M S


Categories

+ M A R K E T S

With performance-driven flooring products across all product lines, FLEXCO® is taking flooring quality, selection and service to even higher levels. From tile and sheet to treads, wall base and accessories, our products work together in color, performance and style to deliver cohesive design, installation and maintenance.



Rubber Flooring + Vinyl Flooring



Stair Treads



Wall Base + Accessories



FlexOne Pricing

FlexOne pricing from FLEXCO® affords you an easier way to choose product. With our FlexOne pricing structure, you pay the same price for any color within the same color palette in that product line. This allows you to focus on developing floor designs that achieve your desired environment or function without worrying about price differentiation.

Just imagine a confetti of colors for a cafeteria floor or bold lines for wayfinding in a healthcare facility. Create custom flooring designs for hotel ballrooms and conference centers or install a serene expanse of solid color from wall to wall. FlexOne pricing makes it easy for you to achieve all of your design objectives.

Healthcare

Whether it's the rush traffic of a trauma center or the soothing environment of a nursing home, FLEXCO® rubber and vinyl flooring handles the high traffic while delivering styles that contribute to a caring atmosphere. Specialized wall base and slip-resistant treads keep facilities clean and safe for patients and medical staff.



Retail

Advances in today's vinyl materials make products like Natural Elements Premium LVT a natural fit for busy retail environments that want to upgrade their style and performance.



Education

It's a lesson in design, durability and daily resilience. From inspiring learning experiences in today's modern classrooms to taking on class changes in the hallways, FLEXCO® rubber and vinyl flooring adds visual interest while making maintenance a breeze.



Hospitality

Go with a look of stone or wood, or create exciting splashes of color with custom patterns and designs. FLEXCO® products give you complete flexibility to make your flooring an integral part of your atmosphere.



Sports

With FLEXCO®'s sports and multipurpose flooring, style is just one of our strengths. Choose from various recycled rubber products that are ready for a daily workout, while lending unique colors and versatility for weight rooms, tracks, entryways and other applications that need to stand tough.



Coordinating rubber and vinyl stair treads, custom logos and custom colors are available to complement any environment.




Life Cycle

B E N E F I T S

RUBBER + VINYL FLOORING SYSTEMS



In highly used, highly abused environments like the healthcare sector, the “cheapest” flooring products can be the most expensive choice over the lifetime of the floor. More expensive floors – like rubber – can actually be the cheapest at a little over half the cost of the next closest option over the lifetime of the floor. Even at five years, payback for some of the more expensive floors had disqualified the cheaper floors. Theoretically, in a large hospital over 15 years’ time, millions of dollars could be saved by installing floors that do not require finishing. Rubber seems to be the best product overall. It doesn’t move over years, decay or wear like most other products.

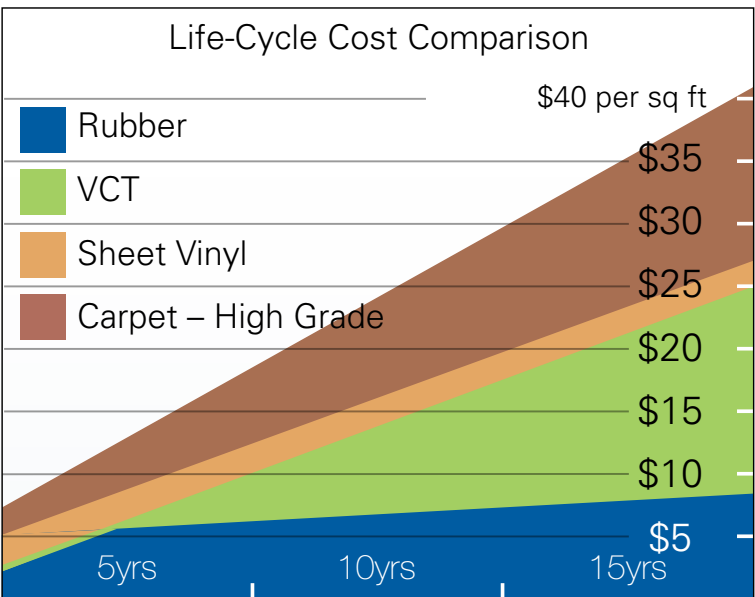

Life-Cycle Methodology Includes The Cost Cleaned:			
product	material cost per sq. ft	cleaning cost per 1,000 sq. ft over 15 yrs.	
VCT	\$1.20 - \$1.50 SF	\$24,313	17x*
Sh Vinyl	\$2.47 - \$5.00 SF	\$25,879	8x*
NF Sh Vinyl	\$4.00 - \$5.00 SF	\$15,640	4x*
Rubber	\$4.00 - \$5.50 SF	\$ 8,095	2x*
Carpet	\$6.67 - \$25.50 SF	\$21,982	9x*

*denotes the number of times the original cost of the floor.

Source: How to Make Business Decisions for Facility
Flooring Suzanne R. Barnes, AIA, CFM

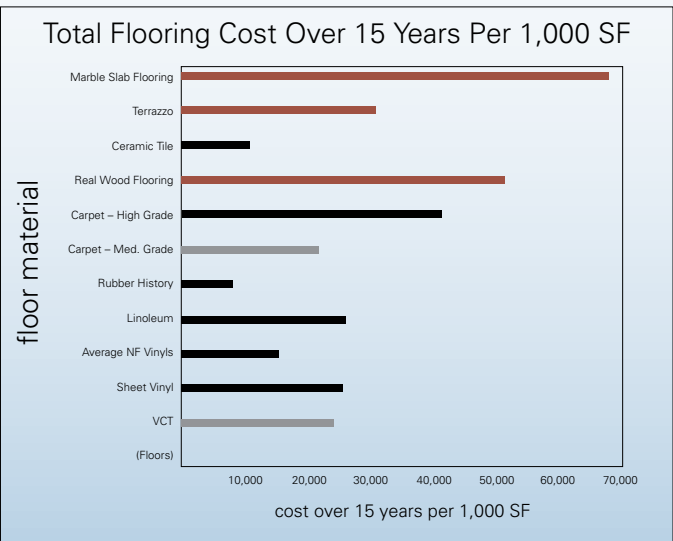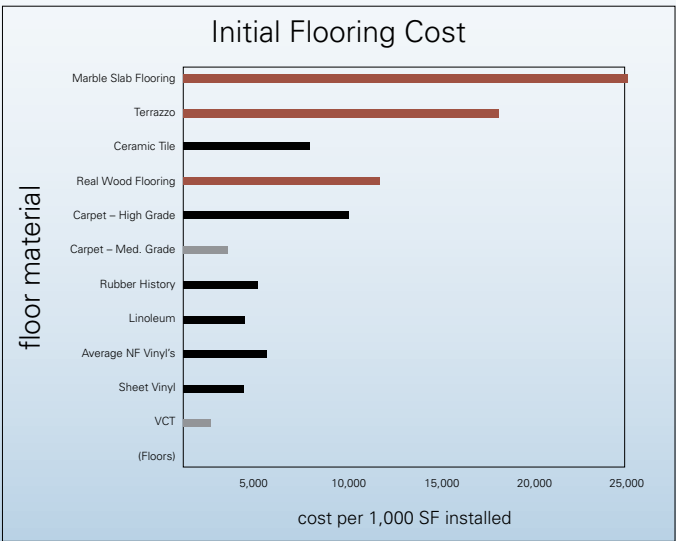



FLEXCO®

DISTINCT DESIGNS

Rubber Flooring

TILE + SHEET

Naturally resistant to mold and mildew, FLEXCO® rubber floors are designed for durability, versatility and slip resistance, plus they're very quiet and comfortable underfoot. Choose from textured, smooth and environmentally-friendly tile, in colors and patterns to match any design or application, from showrooms and residences to auto shops and bakeries.

FLEXCO®
AMERICAN-MADE FLOORING

Rubber Flooring
Color Palettes
FlexTones®



Evolving Styles®



SpexTones™



Sports + Multipurpose
Flooring

Tuflex® Force®



Prime Sports™



FlexTuft®



RUBBER FLOORING

FlexTones®

TEXTURED RUBBER TILE



- 1 **PVC-free rubber tiles**
- 2 **Homogeneous color**
- 3 **Reduces leg fatigue and noise**
- 4 **FlexOne pricing – solid colors all one price**
- 5 **Natural resistance to bacteria and fungi in accordance with ASTM G21**




F

eaturing 57 colors, FlexTones® coordinate across tile, tread, wall base and accessories for consistent color and flexible design. The raised and textured patterns allow dirt and water to drain off of the walking surface, increasing traction and improving slip resistance. Our low profile versions are ideal for areas with small-wheeled vehicular traffic, such as retail stores, healthcare facilities, airport terminals and more.

FLEXCO®
AMERICAN-MADE FLOORING

FlexTones®
COLORS

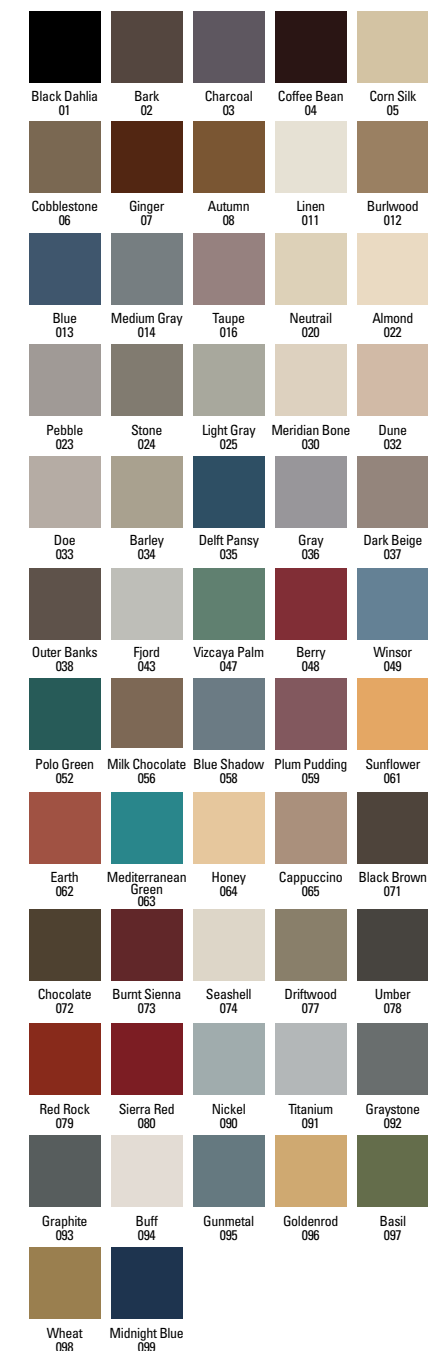

Complete specs on pages 30-31.

FLEXCO®
AMERICAN-MADE FLOORING

Evolving Styles®
Creative Elements
COLORS




White w/Black
CE-100



French Gray
w/Black
CE-103



Black w/White
CE-109



Beige w/White
& Brown
CE-119



Beige w/Brown
CE-123



Light Gray
CE-125



Blue
CE-131



White w/Blue
CE-132



Delft Pansy
CE-135



Charcoal
w/Black
CE-143



Sage
CE-150



White w/Sage
CE-151



Vintage Plum
CE-160



Mediterranean
Green
CE-163



Honey
CE-164



Red w/White
CE-166

Creative Elements

EVOLVING STYLES®

RUBBER TILE + SHEET

- 1 PVC-free rubber tile and sheet
- 2 Natural resistance to bacteria and fungi in accordance with ASTM G21
- 3 Homogeneous color
- 4 Quiet and extremely comfortable walking surface
- 5 Low maintenance, no finishes required




The Evolving Styles® Creative Elements collection offers so much selection. Choose from two gauges, various tile sizes and sheet rubber flooring. You also have the option of using FLEXCO® Rubber Welding Beads to create a seamless installation for clean rooms and areas that have strict requirements for added hygiene.

Complete specs on pages 30-31.

FLEXCO
AMERICAN-MADE FLOORING

Evolving Styles®
Wood Elements
COLORS



EVOLVING STYLES® Wood Elements

RUBBER TILE + SHEET

- 1 **PVC-free rubber tile and sheet**
- 2 **Natural resistance to bacteria and fungi in accordance with ASTM G21**
- 3 **Homogeneous color**
- 4 **Quiet and extremely comfortable walking surface**
- 5 **Low maintenance, no finishes required**



The Evolving Styles® Wood Elements collection combines a unique wood aesthetic with the durability and comfort of rubber. The two gauges, various tile sizes and sheet rubber flooring options open up your opportunities for gymnasiums, all-purpose rooms and other active facilities. FLEXCO® Rubber Welding Beads create a seamless installation for areas that have strict requirements for added hygiene.

Complete specs on pages 30-31.

SpexTones™

RUBBER TILE

- 1 PVC-free rubber tile
- 2 Natural resistance to bacteria and fungi in accordance with ASTM G21
- 3 Colors coordinate with FlexTones®
- 4 Conceals dirt and subsurface irregularities
- 5 Exceeds ADA recommendations for slip resistance



LEXCO®'s SpexTones™ product line is highlighted by speckled coloration that works well for high-traffic areas prone to everyday dirt and scuffing. It's everything you need to specify your next project with more confidence and in less time.

FLEXCO
AMERICAN-MADE FLOORING

SpexTones™ COLORS



Black Dahlia
w/ Medium
Gray, Fjord
01



Charcoal w/
Black Dahlia,
Doe
03



Autumn w/
Ginger,
Burlwood,
Corn Silk
08



Medium Gray
w/ Graphite,
Seashell
014



Neutrail w/
Seashell,
Spring Leaf
020



Light Gray w/
Delft Pansy,
Medium Gray
025



Arctic
w/ Nickel,
Titanium, Linen
029




Doe w/ Milk
Chocolate,
Beige
033



Delft Pansy w/
Winsor, Doe
035



Dark Beige
w/ Seashell,
Fjord
037



Vizcaya Palm
w/ Polo Green,
Cappuccino
047




Berry w/ Black
Dahlia,
Medium Gray
048



Winsor w/
Delft Pansy,
Fjord
049



Polo Green w/
Vizcaya Palm,
Milk Chocolate
052



Milk Chocolate
w/ Bark, Doe
056




Blue Shadow
w/ Delft Pansy,
Doe
058



Plum Pudding w/
Delft Pansy,
Medium Gray
059



Seashell w/
Medium Gray,
Nickel
074



Nickel w/
Graphite,
Linen
090



Wheat w/
Autumn,
Corn Silk
098



Twilight Blue
w/ Arctic,
Neutrail
301



Spring Leaf w/
Arctic,
Neutrail
302

Complete specs on pages 30-31.



FreeFlex®

RUBBER TILE



- 1 PVC-free rubber tile
- 2 Sizes offer limitless creative possibilities
- 3 Natural resistance to bacteria and fungi in accordance with ASTM G21
- 4 Exceeds ADA recommendations for slip resistance
- 5 Quiet and extremely comfortable walking surface



Imagine a world where you're free to create, a place where your ideas are unrestricted. The FreeFlex® collection offers rubber tile sizes that coordinate well with other flooring materials, such as carpet tile and LVT, while affording the extreme durability and resilience of rubber. The creative possibilities are endless.

FLEXCO®
AMERICAN-MADE FLOORING

FreeFlex®
SIZES & COLORS

Available Sizes:
6" x 36"
12" x 36"
18" x 36"

FreeFlex® is available in the following rubber tile and stair tread color palettes.

FlexTones®
COLORS



See page 11
for all 57 colors
available

EVOLVING STYLES®
Creative Elements
COLORS




See page 13
for all 16 colors
available

EVOLVING STYLES®
Wood Elements
COLORS



See page 15
for all 4 colors
available

SpexTones™
COLORS



See page 17
for all 22 colors
available

FlexTones® palette available in Hammered profile.

Creative Elements, Wood Elements and SpexTones™ available in Hammered or Smooth profiles.

Complete specs on page 31.



Tuflex® Force®

RECYCLED RUBBER TILE

FLEXCO®

5
TOP

- 1 Red List Free
- 2 100% Recyclable
- 3 Lifetime Delamination Warranty
- 4 Exclusive 10-Year Performance Warranty
- 5 Exceeds OSHA and ADA standards for traction



M

ake style and endurance an everyday practice. With its patented vulcanization process using predominantly recycled rubber, Tuflex® Force® Resilient Rubber Flooring tiles have been keeping sports and commercial facilities in peak condition since 1957.

FLEXCO®
AMERICAN-MADE FLOORING

Tuflex® Force® COLORS



Black Dahlia
w/ Medium
Gray, Fjord
01



Charcoal w/
Black Dahlia,
Doe
03



Light Gray w/
Delft Pansy,
Medium Gray
025



Doe w/ Milk
Chocolate,
Beige
033



Delft Pansy w/
Winsor, Doe
035



Vizcaya Palm
w/ Polo Green,
Cappuccino
047



Berry w/ Black
Dahlia,
Medium Gray
048



Winsor w/
Delft Pansy,
Fjord
049



Polo Green w/
Vizcaya Palm,
Milk Chocolate
052



Milk Chocolate
w/Bark, Doe
056



Blue Shadow
w/ Delft Pansy,
Doe
058



Plum Pudding w/
Delft Pansy,
Medium Gray
059



Onyx
111

Complete specs on pages 32-33.

Prime Sports™

RUBBER TILE

- 1 Available in rolls, square edge tiles and interlocking tiles; custom roll options available
- 2 Four gauge options
- 3 Outstanding sound and shock absorption
- 4 Indoor/outdoor
- 5 Standard 10% chip content, or special order up to 90% chip content with one or multiple colors




Highly functional. Highly affordable. Prime Sports™ Flooring is a rubber recreational flooring that is well-conditioned to take on a rigorous workout or provide added walking comfort and slip-resistance. Designed for commercial, industrial and fitness applications, Prime Sports™ Flooring is recommended for play areas, golf shops, fitness centers, daycares, ramps, locker rooms, cardio areas, ice arenas and retail flooring.

FLEXCO
AMERICAN-MADE FLOORING


Prime Sports™
COLORS




Black Dahlia
PSF-001




Evergreen
PSF-200




Ruby Red
PSF-201




Dove
PSF-202




Vanilla
PSF-203



Starlight
PSF-204



Blue Ice
PSF-205



Daffodil
PSF-206

Complete specs on pages 32-33.

FlexTuft®

R E C Y C L E D R U B B E R T I L E

- 1 **Modular tile units allow for diverse patterns**
- 2 **Vulcanized and non-vulcanized backing**
- 3 **Easy maintenance**
- 4 **Indoor/outdoor**
- 5 **90% recycled content**




Made in the
U.S.A.

F


lexTuft® is miles away from ordinary rubber tile. Made from recycled tires, it can withstand repeated water dousing, high traffic, heavy loading and exposure to the elements. With FlexTuft® rubber tile, what's good for the environment is also good for the most challenging indoor and outdoor settings. In fact, this durable, anti-slip flooring meets ADA recommendations for ramps and is ideal for foyers, exercise facilities and stairways.

FLEXCO®
AMERICAN-MADE FLOORING

FlexTuft®
C O L O R S



Tweed
FT-1



Delft & Gray
FT-3



Cranberry & Gray
FT-4



Spruce & Gray
FT-5

Complete specs on pages 32-33.

Repel™

OIL & GREASE RESISTANT
RUBBER FLOORING



- 1 Won't absorb oil or grease
- 2 PFOA Free
- 3 Slip resistant
- 4 Color-coordinates with wall base and tread
- 5 Formulation inhibits discoloration



R

Repel resists the effects of oil and grease and gives you the flexibility to only spec it where it's needed. The variety of the FLEXCO® portfolio lets you match the floor, the wall base and stair treads for a consistent, color-coordinated look throughout the building.

Repel is available in all rubber tile and stair tread colors, excluding sheet rubber. Repel must be specified at time of order. Do not use around hot grease areas.

FLEXCO®
AMERICAN-MADE FLOORING

Repel™
C O L O R S order prefix: **R**

Repel is available in all rubber tile and stair tread colors, excluding sheet rubber.

FlexTones®
C O L O R S



See page 11
for all 57 colors
available

EVOLVING STYLES®
Creative Elements
C O L O R S




See page 13
for all 16 colors
available

EVOLVING STYLES®
Wood Elements
C O L O R S



See page 15
for all 4 colors
available

SpexTones™
C O L O R S



See page 17
for all 22 colors
available



IMO

RUBBER FLOORING

FLEXCO®

5
TOP

- 1 **The only IMO Rubber Flooring certified by the U.S. Coast Guard**
- 2 **EU Wheelmark certified**
- 3 **PVC Free**
- 4 **Red List Free**
- 5 **Made in the USA from premium raw materials**



The shipping industry is changing every day. New environmental regulations, the demand for higher fuel efficiency and the use of new materials create a rippling effect that touches countless shipbuilding components—including flooring. FLEXCO® is on the forefront, creating a better balance of exceptional sustainability, safety and performance.

FLEXCO®
AMERICAN-MADE FLOORING

IMO Rubber Flooring C O L O R S

IMO is available in all rubber tile colors, excluding sheet rubber.

IMO must be specified upon order.

FlexTones® C O L O R S



See page 11
for all 57 colors
available

Evolving Styles® Creative Elements C O L O R S




See page 13
for all 16 colors
available

Evolving Styles® Wood Elements C O L O R S




See page 15
for all 4 colors
available

SpexTones™ C O L O R S











See page 17
for all 22 colors
available

For FlexTones®, Creative Elements™, Wood Elements™ + SpexTones™ color palettes

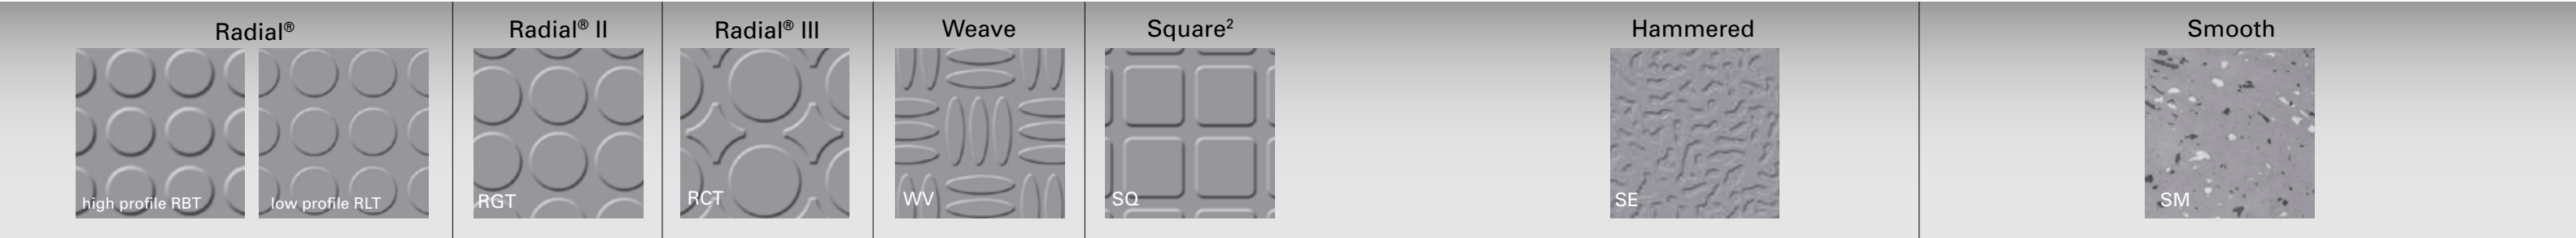

											(Smooth is available in Creative Elements™, Wood Elements™ + SpexTones™ colors only. Smooth rolls are not available in SpexTones™.)					
Radial® (RBT/RLT)		Radial® II (RGT)	Radial® III (RCT)	Weave (WV)	Square² (SQ)	Hammered (SE)					1/8" Smooth †					
GAUGE	1/8"	1/8"	1/8"	1/8"	1/8"	GAUGE	.080"	1/8"	1/8"	1/8"	1/8"	1/8"	1/8"	1/8"	1/8"	
SIZE	18" x 18"	18" x 18"	18" x 18"	18" x 18"	18" x 18"	SIZE	24" x 24"	12" x 12"	18" x 18"	36" x 36"	12" x 12"	18" x 18"	36" x 36"	6" x 36"	12" x 36"	18" x 36"
PIECES /CTN	20	20	20	20	20	PIECES /CTN	20	45	20	6	45	20	6	18	10	6
WEIGHT /CTN (LB)	46	46	46	46	46	WEIGHT /CTN (LB)	60	46	46	62	52	52	62	31.05	34.50	31.05
SQ FT /CTN	45	45	45	45	45	SQ FT /CTN	80	45	45	54	45	45	54	27	30	27

Hammered (SE)				Smooth Rolls	
GAUGE	1/8"	1/8"	1/8"	1/8" Smooth Rolls	
SIZE	6" x 36"	12" x 36"	18" x 36"	.100" Smooth Rolls	
PIECES /CTN	18	10	6	36" x 25' (8 Sq Yds/Roll; 10.8 Lbs./Sq Yd)	
WEIGHT /CTN (LB)	31.05	34.50	31.05	48" x 25' (11 Sq Yds/Roll; 10.8 Lbs./Sq Yd)	
SQ FT /CTN	27	30	27	36" x 25' (8 Sq Yds/Roll; 8.5 Lbs./Sq Yd)	



* Special orders for lengths greater than 25'.
† Sheet rubber manufactured untrimmed must be double-cut on the job site.
** IMO and Repel formulation not available in sheet.
Note: Add HW to color number for pre-grooved Heat Weld tiles available in 36" x 36" x 1/8" gauge.



Rubber Flooring Recommended Adhesives
SP-500 Acrylic Aerosol Pressure-Sensitive Adhesive
AW-510 Acrylic Adhesive
AP-520 Acrylic Roll/Trowelable Pressure-Sensitive Adhesive
MS-700 Modified Silane Wet-Set Adhesive
EW-710 Epoxy Wet-Set Adhesive

Sports + Multipurpose Flooring



Sports Flooring Recommended Adhesives
MS-700 Modified Silane Wet-Set Adhesive
EW-710 Epoxy Wet-Set Adhesive




FLEXCO® products are easy to maintain using new Excelsior™ Maintenance Products. Visit flexcofloors.com for available options for cleaning and finishing.

Tuflex® Force® order prefix: **TF**

GAUGE	3/8"
SIZE	Square: 27" x 27" (5.0625 Sq/Ft per tile)
	Interlocking Tiles: 25-3/4" x 25-3/4" (4.6046 Sq/Ft per tile)
PACKAGING	Maximum 100 tiles per pallet
WEIGHT	11.7 lbs per piece

Square Edge Tile or Interlocking Tile

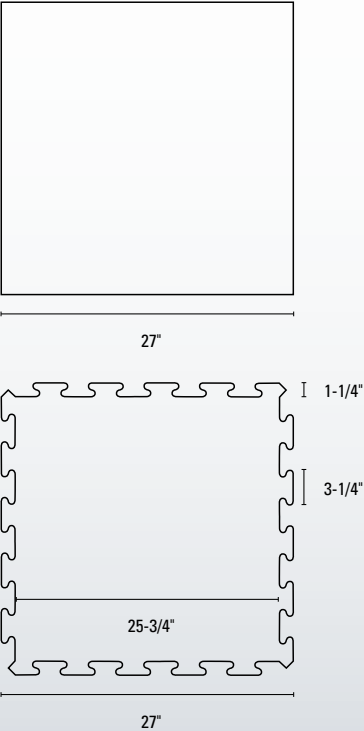


Prime Sports™ order prefix: **PSF**

GAUGE	5/32", 1/4", 3/8", 1/2"
SIZE	Rolls: 48" x 49.5' (22 Sq/Yds, 198 Sq/Ft) Square Edge Tiles: 36" x 36" (9 Sq/Ft per piece) Interlocking Tiles: 34-1/4" x 34-1/4" (8.2 Sq/Ft per piece)
PACKAGING	Unboxed tiles and rolls shrink wrapped and put on pallet

Material may contain skiving marks from the manufacturing process; FLEXCO® does not consider these defects unless they are excessive in nature. Installation of material containing these skive marks is considered acceptance of the material and therefore waiving the right of replacement except under special circumstances determined by FLEXCO®.

Square Edge Tile, Rolls or Interlocking Tile

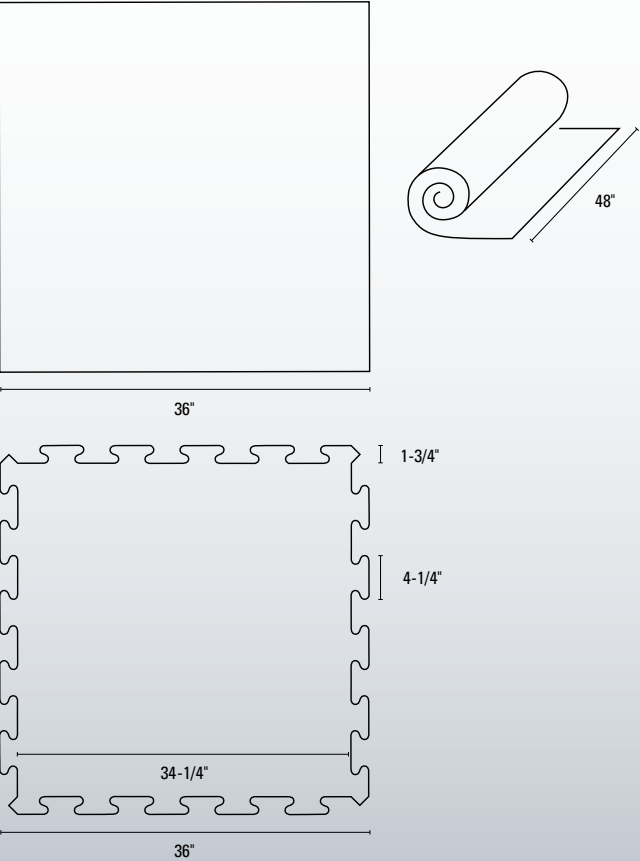

FlexTuft® order prefix: **FT**

SIZE	12" x 12"
VULCANIZED GAUGE	3/8" nominal
NON-VULCANIZED GAUGE	3/8" nominal
PIECES /CTN	25
WEIGHT /CTN (LB)	
VULCANIZED	50
NON-VULCANIZED	52
SQ FT /CTN	25

Note: Add V or NV to the product number for vulcanized or non-vulcanized tile (e.g., FTNV-1 for FlexTuft® Tweed Non-Vulcanized tile).

Non-Vulcanized FlexTuft® tile uses a glued polyester backing. Vulcanized FlexTuft® tile features rubber strips sewn into the backing.

For outdoor use, always use Vulcanized FlexTuft®.

While various environmental conditions may alter the appearance of recycled raw materials used in FlexTuft® flooring, the effects are not necessarily undesirable. When exposed to direct sunlight and other elements, fading will occur.



Vinyl Flooring

TILE + PLANK

F

From retail shops to restaurants to emergency rooms, FLEXCO® vinyl flooring is performance and style through and through.

With no required finishes, it's a solid solution whether your needs are anti-bacterial or all about design. Tough on heavy traffic. Easy to maintain. Our vinyl flooring will stand the tests of time in more ways than one.

FLEXCO
AMERICAN-MADE FLOORING

Natural Elements Wood



Natural Elements Stone



Delane® Solid Vinyl Tile



Geodesy® Solid Vinyl Tile





NATURAL ELEMENTS

Premium Luxury Vinyl Tile Wood



- 1 1/8" gauge, 4" x 36" or 6" x 48" vinyl plank
- 2 Urethane ceramic bead finish reduces potential for scratches and no finishes required; 28 mil wear layer exceeds ASTM F1700 for wear layer
- 3 100% pure virgin material
- 4 Resists bacteria growth
- 5 Over 50% of raw materials are sourced within a 100 mile radius of the manufacturing facility



Blending the beauty of natural woods with the durability and resilience of vinyl flooring, Natural Elements Premium Luxury Vinyl Tile uses original designs to transform rooms with the look and feel of realistic wood. As flexible to install and as easy to use as traditional vinyl tile, this commercial-grade resilient flooring provides the warm and welcoming atmosphere only wood can create.



Natural Elements Wood
4" x 36" or 6" x 48" planks






	
Black Sable 608	Antique Silver 609
	
American Cherry 610	Warm Amber Cherry 611
	
Sequoia Cherry 613	Walnut 615
	
Rustic Walnut 616	Antique Teak 618
	
Chestnut 619	Traditional Oak 620
	
Natural Oak 622	Rustic Oak 624
	
Blonde 636	Caramel 637
	
Cool Gunstock 638	Russett 639
	
Weathered Oak 640	Winchester 641
	
Timberwolf 642	Castle Gray 643
	
Driftwood 644	Barnwood 645
	
Whitewash 646	Mystique 647
	
Pickled Oak 648	

Photo courtesy of JRA Architects, Louisville, KY
Complete specs on page 50.



NATURAL ELEMENTS

Premium Luxury Vinyl Tile Stone

- 1 1/8" gauge, 18" x 18" vinyl tile (15 colors) or 12" x 24" vinyl tile (8 colors)
- 2 Urethane ceramic bead finish reduces potential for scratches and no finishes required; 28 mil wear layer exceeds ASTM F1700 for wear layer
- 3 100% pure virgin material
- 4 Resists bacteria growth
- 5 Over 50% of raw materials are sourced within a 100 mile radius of the manufacturing facility



With its stylish elegance and polished impression, Natural Elements Premium Luxury Vinyl Tile combines commercial-grade resilient vinyl flooring with the timeless beauty of one of nature's most appreciated materials. Easy to install and maintain, Natural Elements Premium LVT offers the look of stone with the durability and performance of resilient flooring.



FLEXCO
AMERICAN-MADE FLOORING

Natural Elements Stone 18" x 18" tiles




Citrus Breeze 602 Gray Ash 604 Sandstone 605



Vanilla Crème 606 Gray Mist 607 Salsa 626



Sky Blue 627 Cobalt Blue 628 Pear Fusion 629




Lemon Twist 630 Black Knight 631 Dusk 632



Alaskan Mist 633 Drifting Dune 634 Bamboo 635

Natural Elements Stone 12" x 24" tiles



Terrace 649 Pewter 650 Linen 651



Chateau 652 Bayou 653 Pontchartrain 654



Orleans 655 Claiborne 656

Complete specs on page 50.

DELANE[®] Solid Vinyl TILE

- 1 .080" or 1/8" gauge solid vinyl tile in various sizes
- 2 Easily buffs to a shine, no finishes required
- 3 Designed using bio-based, phthalate-free plasticizer, reducing greenhouse gas impact
- 4 May be seamlessly installed by heat welding
- 5 Flexible for quick and easy flash coving




Delane[®] Solid Vinyl Tile C O L O R S



Delane[®] Solid Vinyl Tile is well-suited for healthcare, office, retail and hospitality applications where durability and easy maintenance are desired. Pre-grooved floor tiles can be fused together with Welding Beads in matching or contrasting colors to create a completely seamless "unitized" floor.

Complete specs on page 50.

Geodesy®
Solid Vinyl Tile
C O L O R S

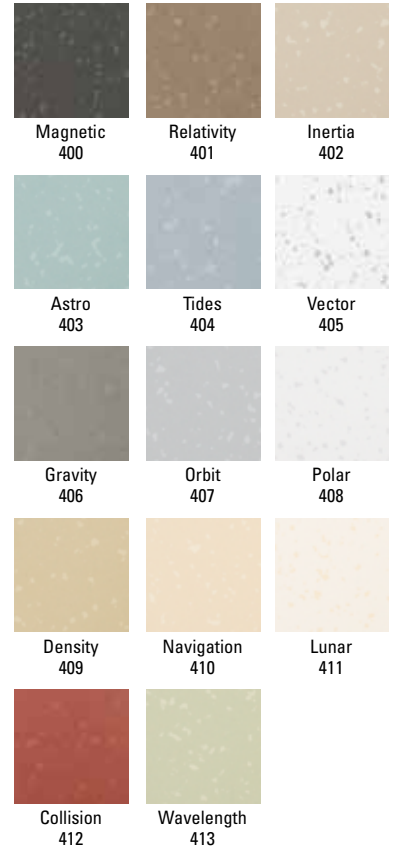

GEODESY®
Solid Vinyl
TILE

- 1 .080" or 1/8" gauge solid vinyl tile in various sizes
- 2 Easily buffs to a shine, no finishes required
- 3 Designed using bio-based, phthalate-free plasticizer, reducing greenhouse gas impact
- 4 May be seamlessly installed by heat welding
- 5 Flexible for quick and easy flash coving



Geodesy® Solid Vinyl Tile brings the beautiful design of tone-on-tone speckled patterns with the durability of solid vinyl. Solid vinyl tile provides significantly better performance and cheaper maintenance than composition tiles.

Complete specs on page 50.



[®]
FLEXCO

ESD Flooring

RUBBER + VINYL

With low-maintenance rubber tile options, FLEXCO® ESD static control flooring offers several options for safety and style. From clean rooms to healthcare environments to data centers, it's an easy-to-monitor solution that eliminates unwanted charges in more ways than one.

FLEXCO
AMERICAN-MADE FLOORING

ESD Rubber





Delane® ESD Vinyl



ESD FLOORING

FLEXCO®
 AMERICAN-MADE FLOORING


ESD Rubber
 COLORS

 Black Dahlia w/
 Medium Gray,
 Fjord
 01

 Medium Gray
 w/Graphite,
 Seashell
 014

 Neutrail w/
 Seashell,
 Spring Leaf
 020

 Delft Pansy w/
 Winsor, Doe
 035

 Dark Beige
 w/Seashell,
 Fjord
 037

 Milk Chocolate
 w/Bark, Doe
 056

 Seashell w/
 Medium Gray,
 Nickel
 074

 Nickel w/
 Graphite,
 Linen
 090

 Twilight Blue
 w/Arctic,
 Neutrail
 301

 Spring Leaf w/
 Arctic,
 Neutrail
 302

ESD Rubber

 STATIC CONTROL
 RUBBER FLOORING

- 1 .080" gauge in 24" x 24" homogeneous rubber tile
- 2 10-year conductivity warranty
- 3 Low maintenance, no finishes required
- 4 May be seamlessly installed by heat welding
- 5 Naturally resists bacteria and fungi in accordance with ASTM G21



From data centers to clean rooms to healthcare facilities, damage to sensitive equipment from electrostatic discharge can cost time and money while disrupting critical daily operations. With ESD static dissipative rubber tile, FLEXCO® brings an expanded color palette plus easy maintenance to facilities looking for superior style and safety in their controlled environments.

Complete specs on page 51.

DELANE® ESD Vinyl

STATIC CONTROL VINYL FLOORING



- 1 **1/8" gauge solid vinyl tile in various sizes, including 12" x 24"***
- 2 **Lifetime conductivity warranty**
- 3 **No finish required to maintain static dissipative qualities**
- 4 **May be seamlessly installed by heat welding**
- 5 **Performs under heavy rolling loads**

*Other options available by special order.



The effects and annual losses attributed to electrostatic discharge (ESD) are estimated to run into the billions of dollars just in the electronics industry alone. To control the static charge, FLEXCO® combines conductive or dissipative vinyl tile with a specially formulated conductive adhesive. This creates a conductive pathway which allows the static to flow through the tile and along the adhesive to the ground point. That makes FLEXCO® ESD static control vinyl flooring an effective first-choice solution to control unwanted human body voltage in areas where mobility cannot be restricted by wrist straps.

Delane® ESD Vinyl COLORS



Complete specs on page 51.

Natural Elements Wood order prefix: **NEW**



GAUGE	1/8"	1/8"
SIZE	4" x 36"	6" x 48"
PIECES /CTN	36	18
WEIGHT /CTN (LB)	36	36
SQ FT /CTN	36	36

Natural Elements Stone order prefix: **NES**



GAUGE	1/8"	1/8"
SIZE	18" x 18"	12" x 24"
PIECES /CTN	16	18
WEIGHT /CTN (LB)	36	36
SQ FT /CTN	36	36

Delane® Solid Vinyl Tile order prefix: **SSV**



GAUGE	1/8"	1/8"	1/8"	1/8"	.080"	.080"	.080"	.080"
SIZE	12" x 12"	12" x 24"	24" x 24"	36" x 36"	12" x 12"	12" x 24"	24" x 24"	36" x 36"
PIECES /CTN	45	16	14	6	70	26	20	10
WEIGHT /CTN (LB)	54	36	67	65	53	37.4	61	68
SQ FT /CTN	45	32	56	54	70	52	80	90

Note: Add HW to color number for pre-grooved Heat Weld tiles (e.g., SSV-40HW) available in 24"x24" and 36" x 36" sizes in 1/8" gauge only. No upcharge.

Geodesy® Solid Vinyl Tile order prefix: **GE**



GAUGE	1/8"	1/8"	1/8"	1/8"	.080"	.080"	.080"	.080"
SIZE	12" x 12"	12" x 24"	24" x 24"	36" x 36"	12" x 12"	12" x 24"	24" x 24"	36" x 36"
PIECES	45	16	14	6	70	26	20	10
WEIGHT /CTN (LB)	54	36	67	65	53	37.4	61	68
SQ FT /CTN	45	32	56	54	70	52	80	90

Note: Add HW to color number for pre-grooved Heat Weld tiles (e.g., GE-400HW) available in 24"x24" and 36" x 36" sizes in 1/8" gauge only. No upcharge.



Vinyl Flooring Recommended Adhesives

SP-500 Acrylic Aerosol Pressure-Sensitive Adhesive*
AW-510 Acrylic Adhesive
AP-520 Acrylic Roll/Trowelable Pressure-Sensitive Adhesive*
MS-700 Modified Silane Wet-Set Adhesive
EW-710 Epoxy Wet-Set Adhesive


**Only for Natural Elements LVT, as pressure-sensitive adhesives are not recommended for solid vinyl tile.*

ESD Rubber order prefix: **SSDR**



GAUGE	.080"
SIZE	24" x 24"
PIECES /CTN	20
WEIGHT /CTN (LB)	60
SQ FT /CTN	80

Oversized 24" x 24" tiles are also available for access panel applications.

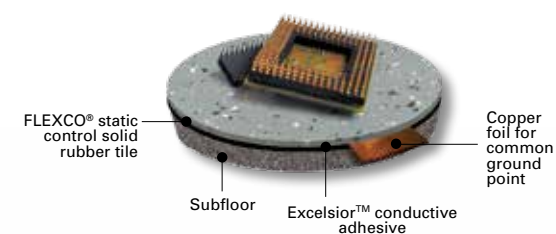

DELANE® ESD Vinyl




Static Dissipative Vinyl Tile order prefix: **DISS**

GAUGE	1/8"	1/8"	1/8"	1/8"
SIZE	12" x 12"	12" x 24"	24" x 24"	36" x 36"
PIECES /CTN	45	16	14	6
WEIGHT /CTN (LB)	54	36	67	65
SQ FT /CTN	45	32	56	54


Note: Add HW to color number for pre-grooved Heat Weld tiles (e.g., SP-40HW) available in 24"x24" and 36" x 36" sizes in 1/8" gauge only. No upcharge.

Oversized 24" x 24" tiles are also available for access panel applications.

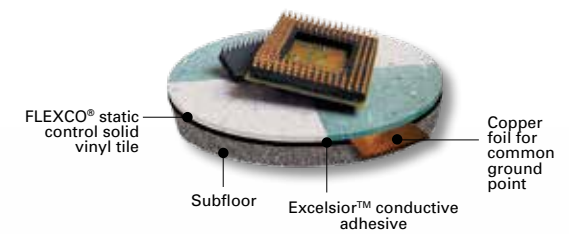

ESD Flooring Recommended Adhesives

ASD-800 Acrylic Wet-Set ESD Adhesive
USD-810 Urethane Wet-Set ESD Adhesive

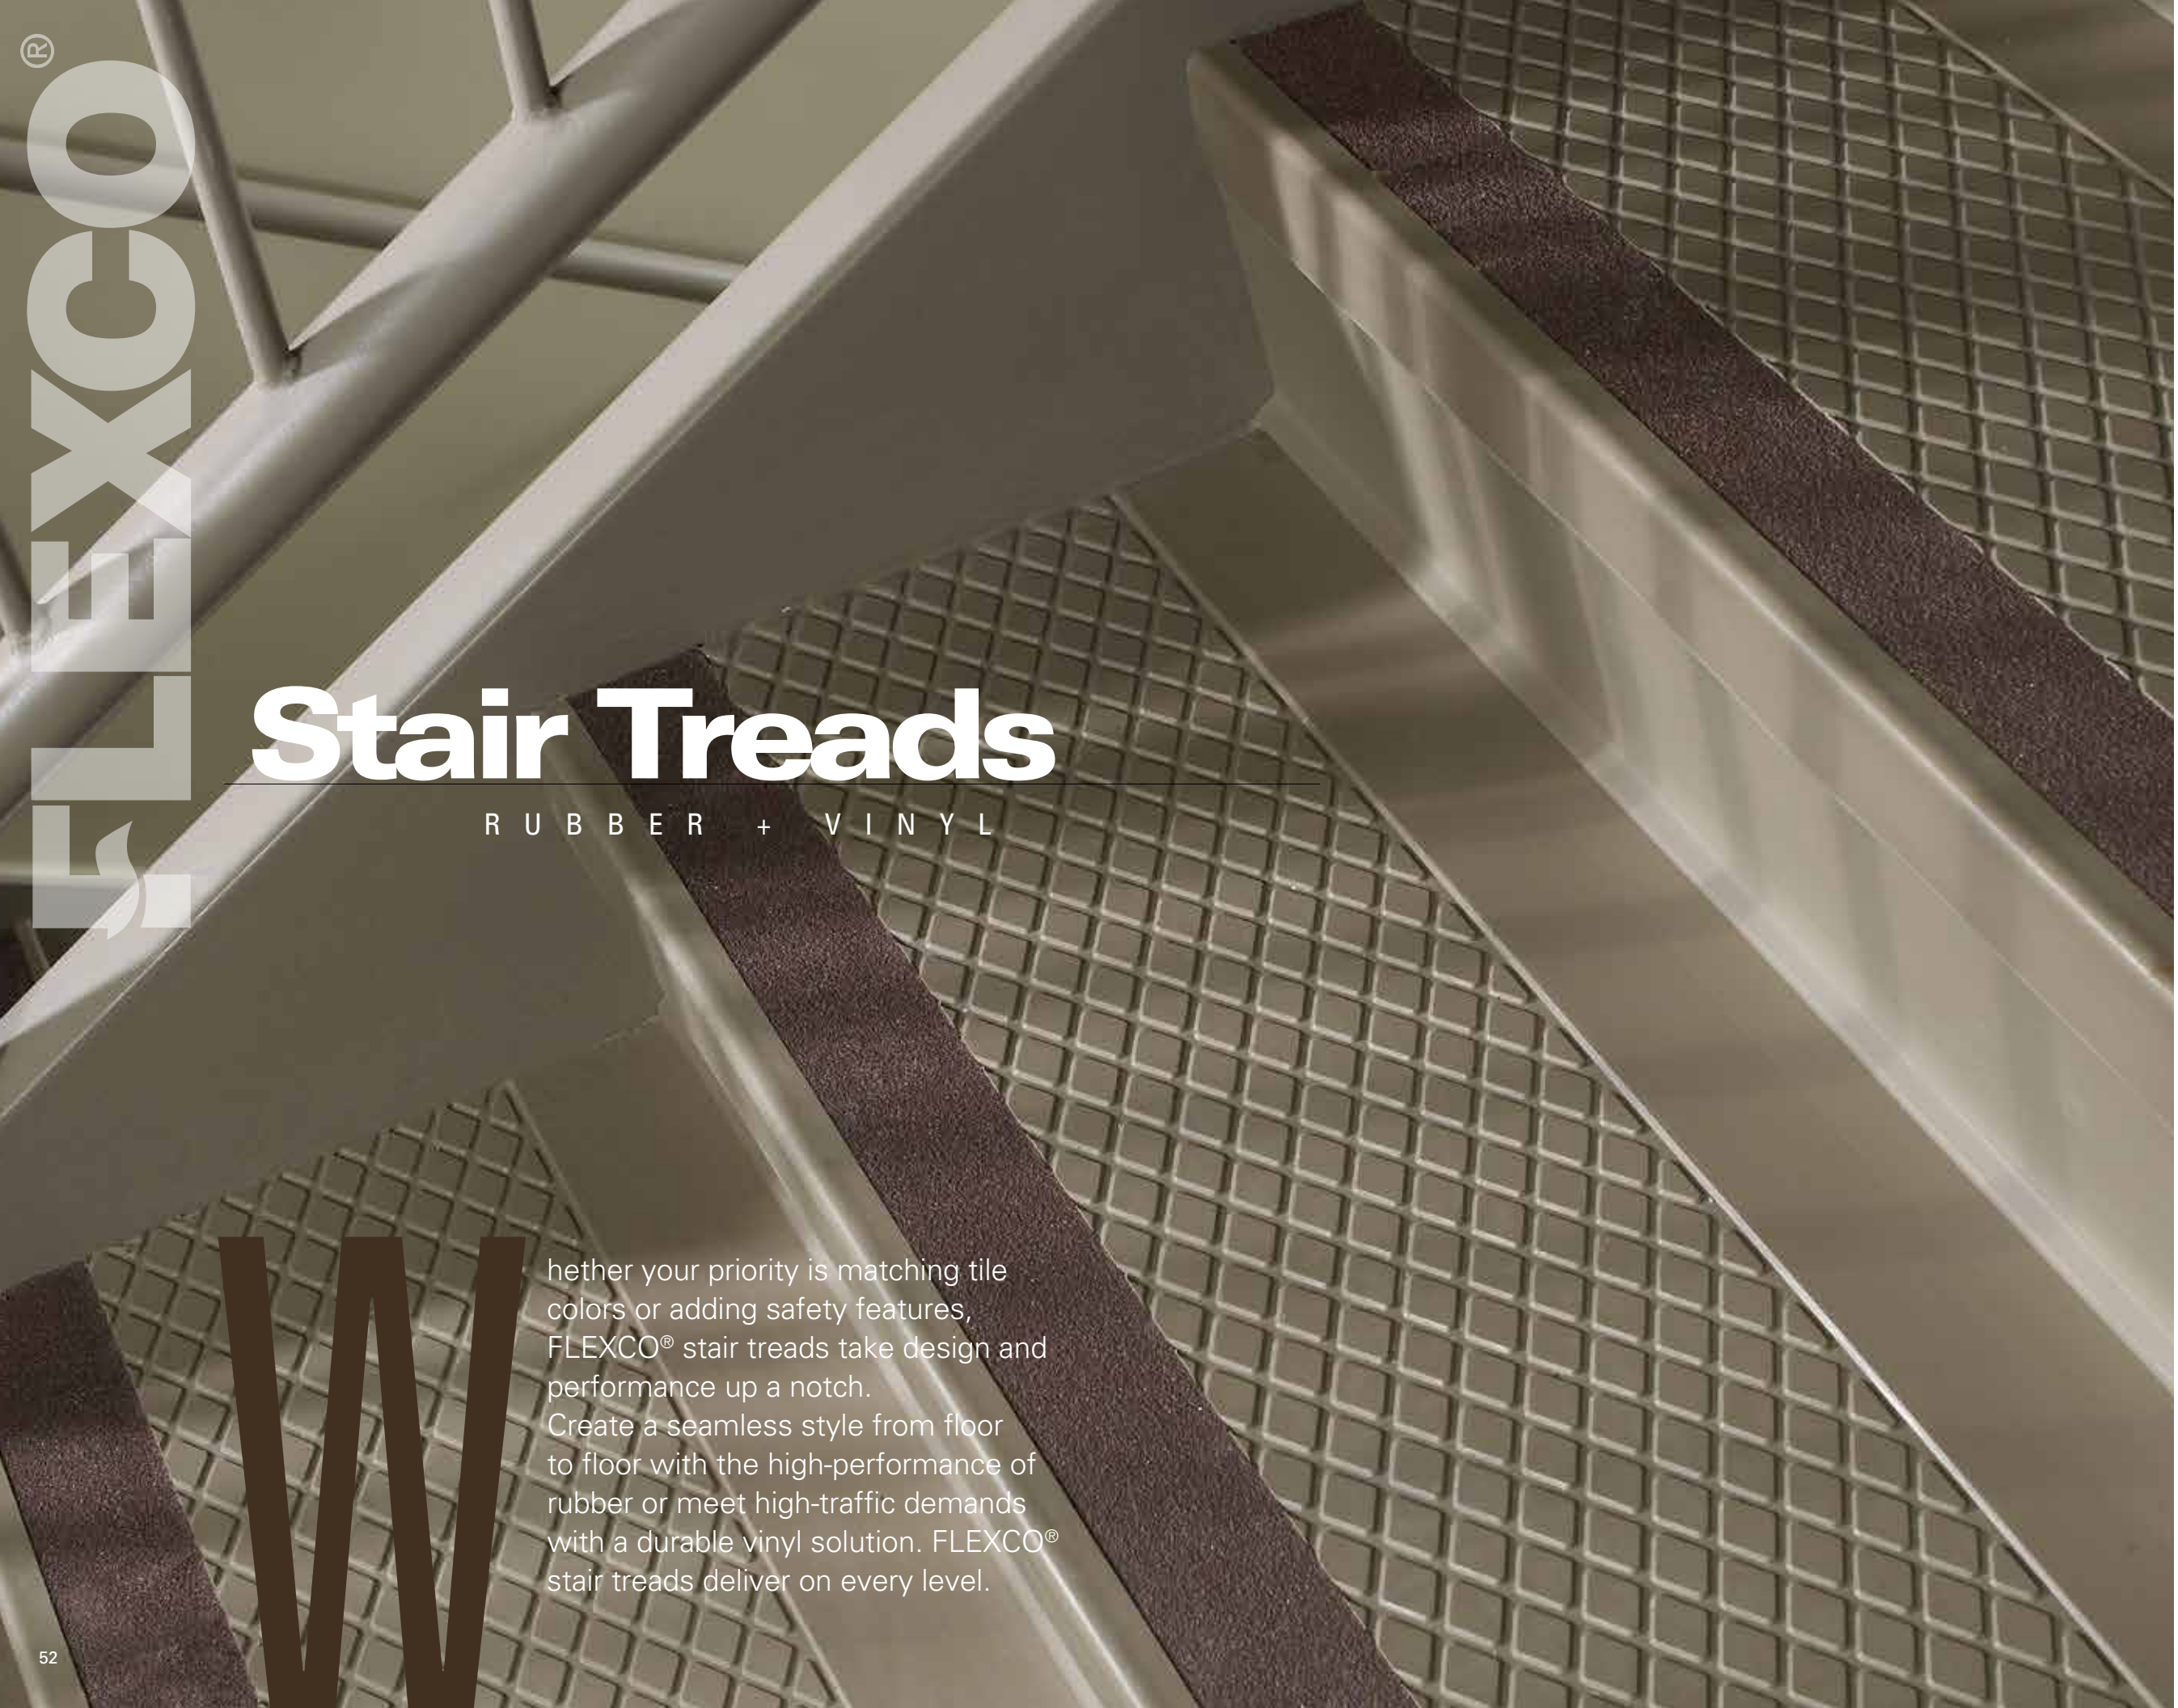

Stair Treads

R U B B E R + V I N Y L

Distinct Designs
Rubber Treads



Vinyl Treads



Metal Treads



FLEXCO® Resilient Stair Treads no longer require epoxy nose filler for most installations.

Whether your priority is matching tile colors or adding safety features, FLEXCO® stair treads take design and performance up a notch. Create a seamless style from floor to floor with the high-performance of rubber or meet high-traffic demands with a durable vinyl solution. FLEXCO® stair treads deliver on every level.

Distinct Designs

RUBBER STAIR TREADS




- 1 **Type TS, PVC-free rubber treads meet ASTM F2169**
- 2 **25-year warranty on metal-reinforced nose treads**
- 3 **Homogeneous construction**
- 4 **Natural resistance to bacteria and fungi in accordance with ASTM G21**
- 5 **Smooth and ribbed inserts or grit strips available**



FLEXCO® offers one of today's most extensive lines of rubber stair treads. Our system of rubber stair treads, risers, stringers and landing tiles was developed to bring style, dependability and efficiency together. So design outside the box. Choose from our Distinct Designs colors to give your project a fresh look.

Rubber treads with our exclusive metal-reinforced nose enhance performance and durability.



Magnified cutaway to show metal-reinforced nose.

Catholic Memorial School,
Roxbury, Massachusetts
Complete specs on pages 60-65.

FLEXCO®
AMERICAN-MADE FLOORING

Rubber Stair Treads COLORS

Rubber stair treads are available in the following Distinct Designs Rubber Tile color palettes.

FlexTones® COLORS



See page 11
for all 57 colors
available

Evolving Styles® Creative Elements COLORS




See page 13
for all 16 colors
available

Evolving Styles® Wood Elements COLORS



See page 15
for all 4 colors
available

SpexTones™ COLORS



See page 17
for all 22 colors
available

Vinyl Stair Treads

C O M M E R C I A L + S T A N D A R D

FLEXCO®

5
TOP

- 1 **Commercial weight VT in 1/4" gauge for heavy traffic**
- 2 **Standard weight LVT in 5/32" gauge for residential applications**
- 3 **Exceeds ADA recommendations for slip resistance**
- 4 **Highly resistant to soil and stains**
- 5 **Ribbed inserts or grit strips available**



Vinyl Stair Treads C O L O R S



Black Dahlia
01



Bark
02



Medium Gray
014



Bagel
019



Almond
022



Dark Beige
037



Sahara
362



Mineral Gray
363



Greystone
364



Rain Forest
368



Khaki
371



Mocha
382



Cobalt
387



Storm Gray
395

Made of tough, long-wearing vinyl with a specially designed safety rib surface, FLEXCO® vinyl stair treads are engineered to meet all the demands of high traffic areas – particularly in settings where design counts.

Complete specs on page 66.

FlexTerior®

METAL STAIR TREADS

- 1 Extruded heat-treated aluminum is resistant to corrosion
- 2 Anti-slip epoxy coating with mineral abrasive grits
- 3 Excellent slip resistance
- 4 UV-stable, custom color matching available
- 5 Pre-drilled with countersunk holes for flush finish



0

Outdoors in rugged conditions, indoors in industrial or commercial applications, FlexTerior® treads provide a slip resistant surface that's made to last. Made of exterior-grade aluminum and inlaid with an epoxy and abrasive grit blend, FlexTerior® treads are ideal for installation on new or existing stairs and landings.

University of North Alabama,
Florence, Alabama
Complete specs on page 67.

FLEXCO®
AMERICAN-MADE FLOORING

FlexTerior® Treads COLORS



Ash

Cactus



Coal*

Sunshine*



Tomato

Walnut




Sapphire

*Coal/Coal and Coal/
Sunshine color
combinations in stock.
All other combinations
are special order. Color
selections must be made
from actual samples.



See page 69 for information on smooth and ribbed rubber inserts or abrasive strips.


Smooth




Heavy Duty Smooth
120, 130 & 170

GAUGE	3/16" at nose
DEPTH	12-1/4"
LENGTHS	36", 42", 48", 54", 60", 66", 72"
NOSE	Square
PIECES /CTN	10
WEIGHT /LIN FT (LB)	1.5
MATCHING PROFILE	Smooth Tile or Sheet and Diamond Landing

Grit strips for 130 in black only.

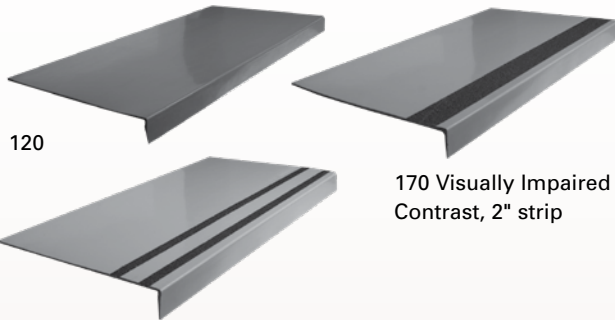

130 Safety Rib two 3/4" strips

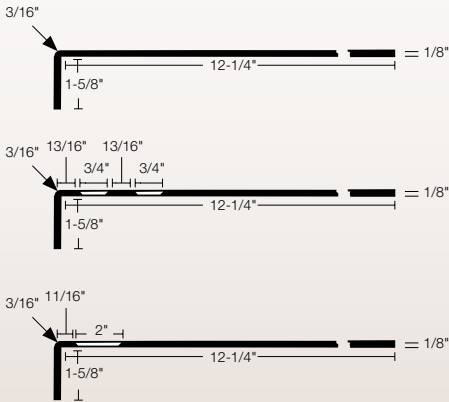


Radial®




Extra Heavy Duty Radial®
500 & 575

GAUGE	5/16" at nose
DEPTH	12"
LENGTHS	36", 42", 48", 54", 60", 66", 72"
NOSE	Square
PIECES /CTN	6
WEIGHT /LIN FT (LB)	2.8
MATCHING PROFILE	Radial® High Profile (RBT)


Exclusive metal-reinforced nose included.

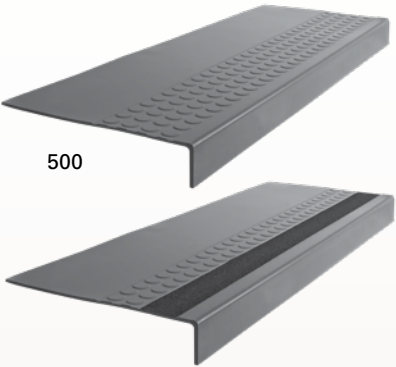

575 Visually Impaired Contrast 2" strip

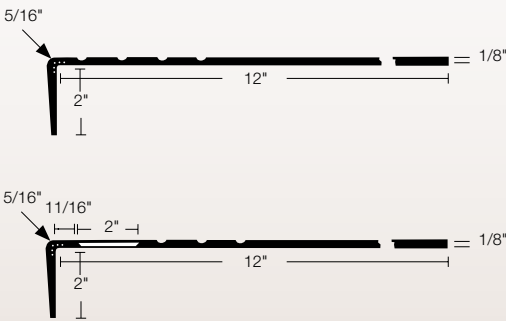


Radial®




Heavy Duty Radial®
550 & 585


GAUGE	3/16" at nose
DEPTH	12"
LENGTHS	36", 42", 48", 54", 60", 66", 72", 78", 84", 90", 96", 102", 108"
NOSE	Square, adjustable to 60°
PIECES /CTN	6 (72" or less), 4 (84" and up)
WEIGHT /LIN FT (LB)	2.4
MATCHING PROFILE	Radial® High Profile (RBT)

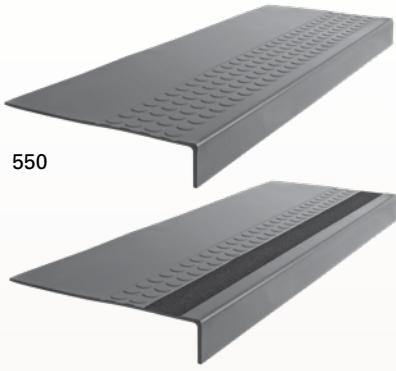

585 Visually Impaired Contrast 2" strip

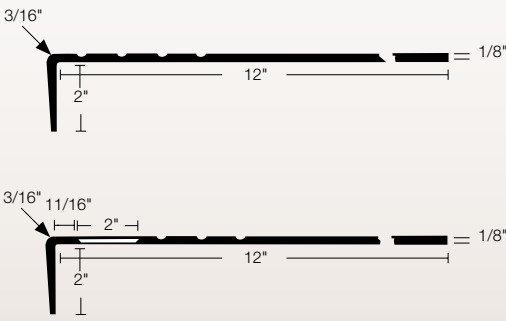


Diamond




Extra Heavy Duty Diamond
600 & 675

GAUGE	5/16" at nose
DEPTH	12"
LENGTHS	36", 42", 48", 54", 60", 66", 72"
NOSE	Square
PIECES /CTN	6
WEIGHT /LIN FT (LB)	600 2.8 / 675 2.4
MATCHING PROFILE	Smooth Tile or Sheet and Diamond Landing

Exclusive metal-reinforced nose included.

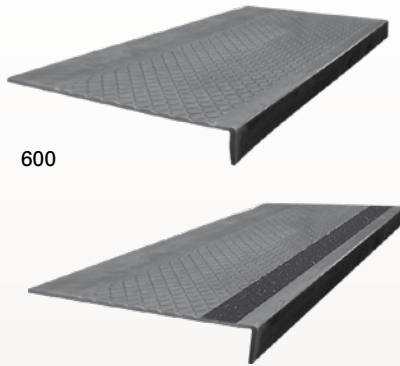


675 Textured/Visually Impaired Contrast 2" strip

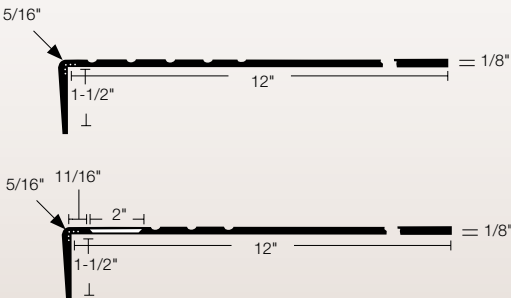






See page 69 for information on smooth and ribbed rubber inserts or abrasive strips.

Diamond




Heavy Duty Diamond
650 & 685

GAUGE	Square 1/4" & round 7/64" at nose
DEPTH	12"
LENGTHS	36", 42", 48", 54", 60", 66", 72", 78", 84", 90", 96", 102", 108"
NOSE	Round Nose only up to 72" in length
PIECES /CTN	6 (72" or less), 4 (84" and up)
WEIGHT /LIN FT (LB)	2.25
MATCHING PROFILE	Smooth Tile or Sheet and Diamond Landing

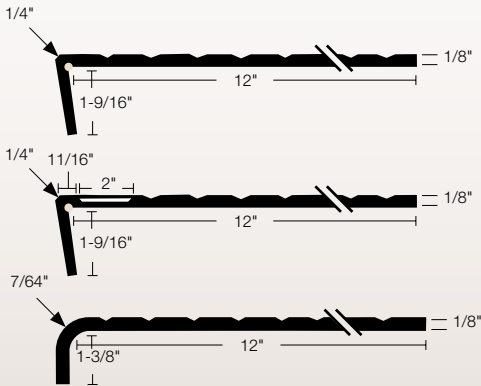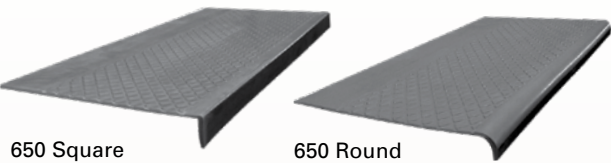


Radial® II




Heavy Duty Radial® II
701 & 776


GAUGE	3/16" at nose
DEPTH	12"
LENGTHS	36", 42", 48", 54", 60", 66", 72", 78", 84", 90", 96", 102", 108"
NOSE	Square, adjustable to 60°
PIECES /CTN	6 (72" or less), 4 (84" and up)
WEIGHT /LIN FT (LB)	2
MATCHING PROFILE	Radial® II (RGT)

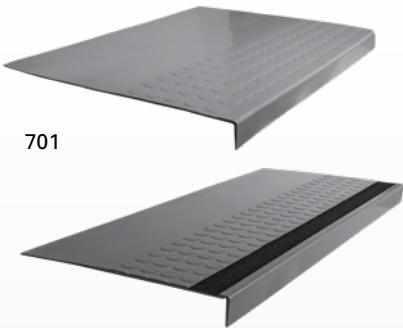

776 Visually Impaired Contrast 2" strip


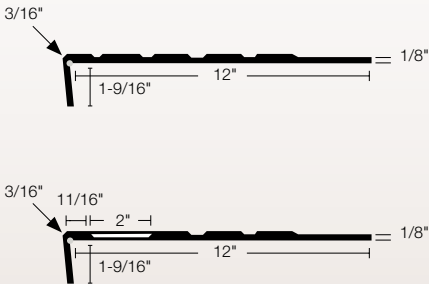


Radial® II




Heavy Duty Extended Radial® II
701E & 776E

GAUGE	1/4" at nose
DEPTH	15"
LENGTHS	36", 42", 48", 54", 60", 66", 72"
NOSE	Square, adjustable to 60°
PIECES /CTN	6
WEIGHT /LIN FT (LB)	2
MATCHING PROFILE	Radial® II (RGT)

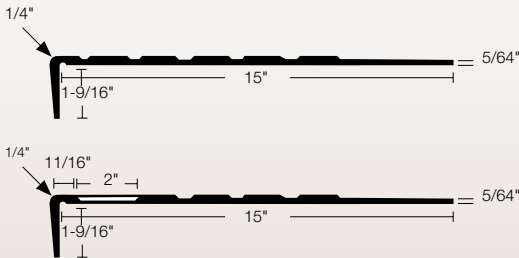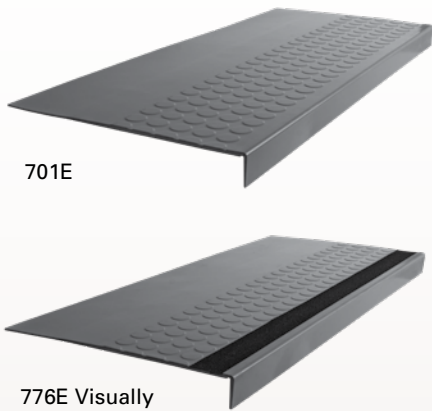


Square²




Heavy Duty Square²
800 & 875

GAUGE	1/4" at nose
DEPTH	12-1/4"
LENGTHS	36", 42", 48", 54", 60", 66", 72"
NOSE	Square
PIECES /CTN	6 (72" or less)
WEIGHT /LIN FT (LB)	2.8
MATCHING PROFILE	Square² (SQ)

Exclusive metal-reinforced nose included.

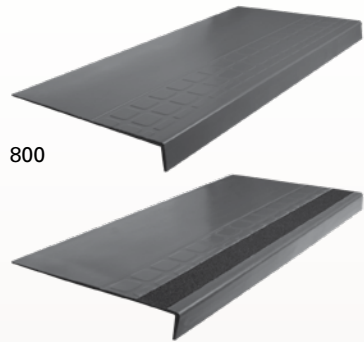

875 Visually Impaired Contrast 2" strip

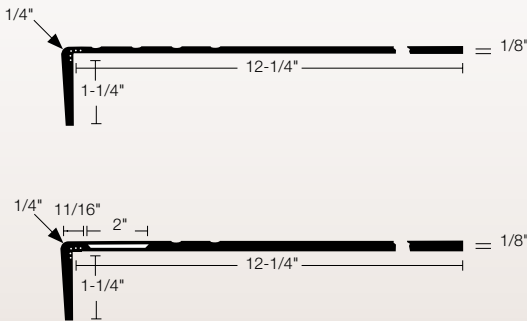

Rubber Stair Treads




See page 69 for information on smooth and ribbed rubber inserts or abrasive strips.

Hammered



Radial® II




Hammered




Heavy Duty Hammered Tread with Adjustable Square Nose 900 & 975

GAUGE	13/64" at nose
DEPTH	12-1/2"
LENGTHS	36", 42", 48", 54", 60", 66", 72", 78", 84", 90", 96", 102", 108"
NOSE	Square, adjustable
PIECES /CTN	6 (72" or less), 4 (84" and up)
WEIGHT /LIN FT (LB)	2.0
MATCHING PROFILE	Hammered (SE)

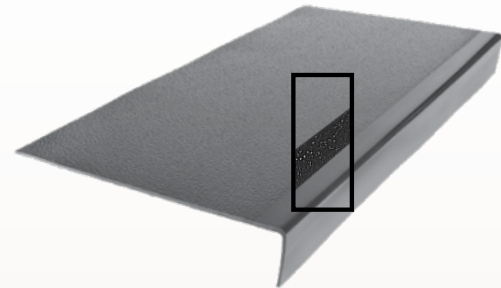


900

975 Visually Impaired Contrast 2" strip

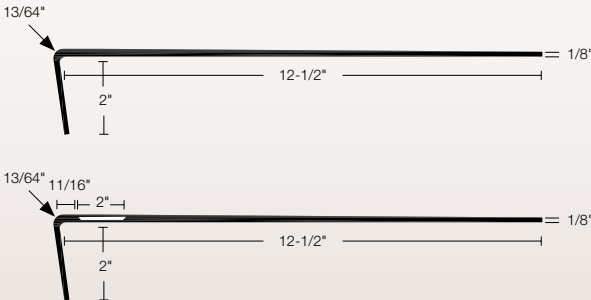


Heavy Duty Radial® II One-Piece Tread with Riser 1701 & 1776

GAUGE	1/4" at nose
DEPTH	20-1/2"
LENGTHS	36", 42", 48", 54", 60", 66", 72", 78", 84", 90", 96", 102", 108"
NOSE	Square, adjustable to 60°
PIECES /CTN	6 (48" or less), 4 (54" and up)
WEIGHT /LIN FT (LB)	2.5
MATCHING PROFILE	Radial® II (RGT)

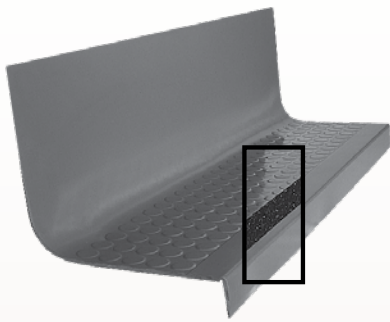


1701

1776 Visually Impaired Contrast 2" strip

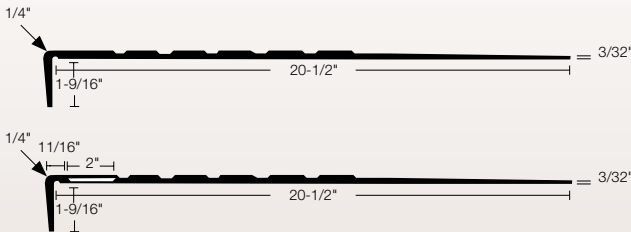


Heavy Duty Hammered One-Piece Tread with Riser 1900 & 1975

GAUGE	13/64" at nose
DEPTH	20-3/8"
LENGTHS	36", 42", 48", 54", 60", 66", 72"
NOSE	Square
PIECES /CTN	6
WEIGHT /LIN FT (LB)	2.5
MATCHING PROFILE	Hammered (SE)

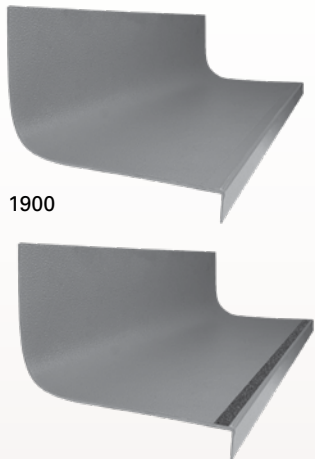


1900

1975 Visually Impaired Contrast, 2" strip

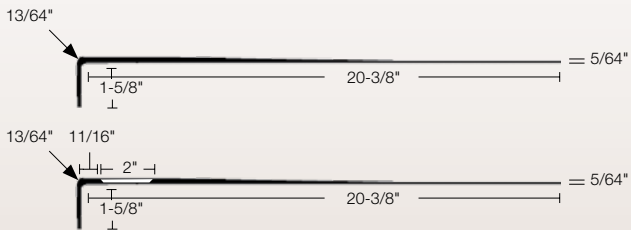


Tread Options for 701, 776, 1701, 1776, 701E, 1776E

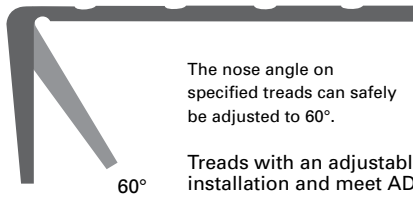

The nose angle on specified treads can safely be adjusted to 60°.

Treads with an adjustable nose help speed installation and meet ADA recommendations.

Tread Options for 500, 575, 600, 675, 800, 875

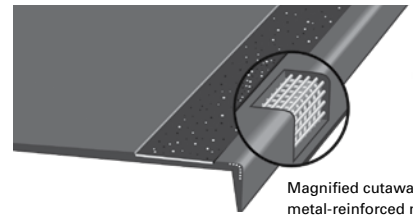


Magnified cutaway to show metal-reinforced nose.




Rubber treads with our exclusive metal-reinforced nose enhance performance and durability.

Rubber Stringers + Risers



STR

order prefix:	STR*
Stringer Material	
Gauge	.080"
Size	10" x 72"
Pieces /Ctn	10
Weight /Lin Ft (lb)	0.65



RSR

order prefix:	RSR**
Risers	
Gauge	1/8" solid
Size	1/8" marbledized
Height	7"
Lengths	36", 42", 48", 54", 60", 72", 84", 96", 108"
Pieces /Ctn	24
Weight /Lin Ft (lb)	0.75

*Risers over 84" will be packaged 10 per carton.

*Use prefix SSTR for SpexTones™ colors. **Use prefix SRSR for SpexTones™ colors.
> Rubber stringers and risers available in FlexTones®, SpexTones™ and Evolving Styles® colors.



Rubber Tread, Risers & Stringers Recommended Adhesives

- AW-510 Acrylic Adhesive
- TP-620 Pressure-Sensitive Tape Adhesive
- C-630 Contact Adhesive
- MS-700 Modified Silane Wet-Set Adhesive
- EW-710 Epoxy Wet-Set Adhesive
- EN-610 Epoxy Nose Filler



Standard Safety Rib Tread

order prefix: **LVT**

GAUGE	5/32" at nose
DEPTH	12-1/4"
LENGTHS	42", 48", 72" 36" Available w/Min. Order 50 Treads
NOSE	Round or square
PIECES /CTN	10
WEIGHT /LIN FT (LB)	1.5



Commercial Safety Rib Tread

order prefix: **VT**

GAUGE	1/4" at nose
DEPTH	12-1/4"
LENGTHS	42", 48", 72" 36" Available w/Min. Order 50 Treads
NOSE	Round or square
PIECES /CTN	6
WEIGHT /LIN FT (LB)	2




FlexTerior® Treads

order prefix: **FLEX**


GAUGE	1/4" overall
DEPTH	4", 9", plus 11"
LENGTHS	36", 48" Over 48" Special Order
NOSE	Square
PIECES /CTN	6 Special Order TBD
WEIGHT /LIN FT (LB)	2.2 for 9" or 2.76 for 11"
SCREW PACKAGING	36" - 9 per set 48" - 13 per set

Note: Must indicate concrete or wood installation for proper mechanical fasteners. A premium-grade, exterior polyurethane adhesive approved by the adhesive manufacturer for bonding aluminum directly to concrete, exterior-grade plywood or metal is required.


***Leave room for contraction and expansion of treads when taking measurements for depth and length.**

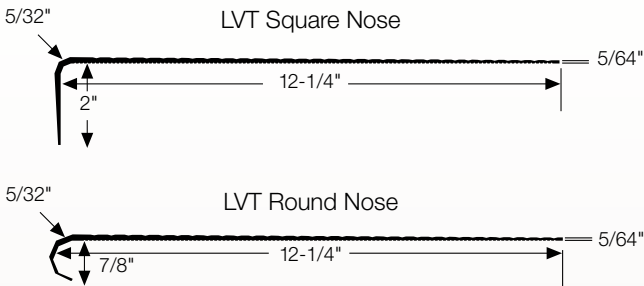

Adjustable nose portion should be secured with contact adhesive or FlexTape according to FLEXCO® instructions.

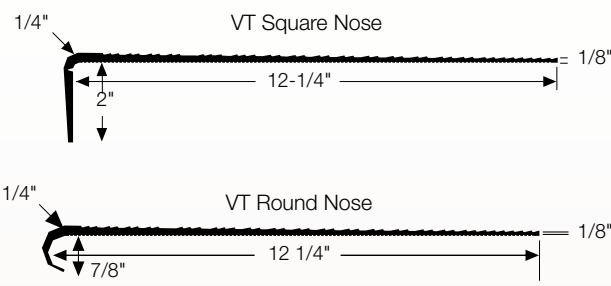

Adjustable nose portion should be secured with contact adhesive or FlexTape according to FLEXCO® instructions.

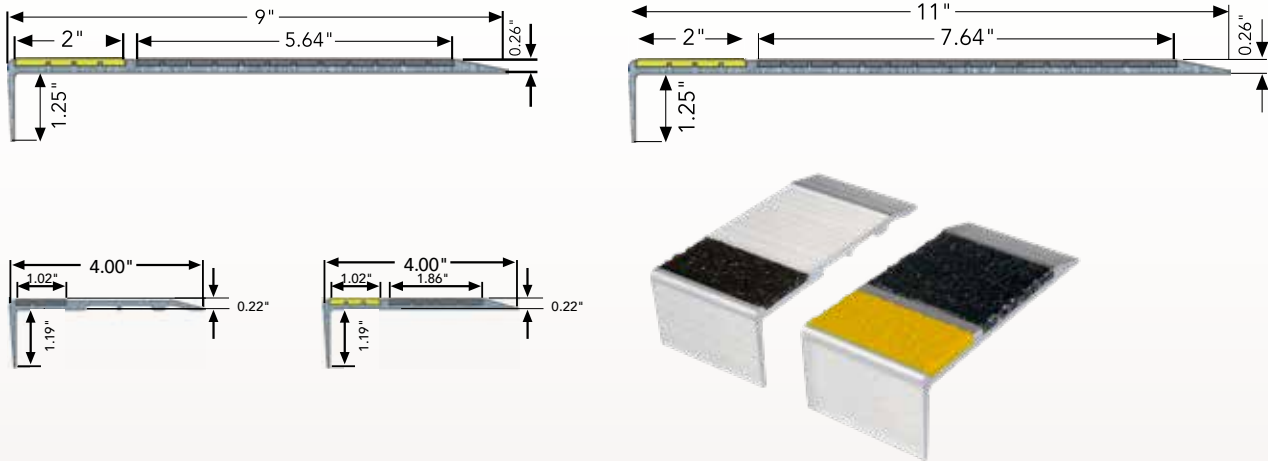


Vinyl Stringers + Risers



STV

order prefix: **STV**

Stringer Material
Gauge .080"
Size 10"
Length 50' rolls
Weight/ 38
Lin Ft (lb) 0.75



RSV


order prefix: **RSV**

Risers
Gauge .080" solid
Height 7"
Length 50' rolls
Weight/ 38
Lin Ft (lb) 0.75




Vinyl Tread, Risers & Stringers Recommended Adhesives

AW-510 Acrylic Adhesive
TP-620 Pressure-Sensitive Tape Adhesive
C-630 Contact Adhesive
MS-700 Modified Silane Wet-Set Adhesive
EW-710 Epoxy Wet-Set Adhesive
EN-610 Epoxy Nose Filler

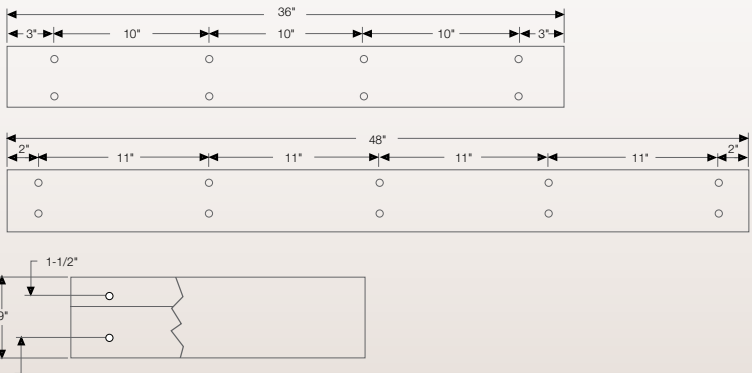

Adhesive Options
Specify type of installation for correct screws. Premium-grade, exterior polyurethane construction adhesive required.

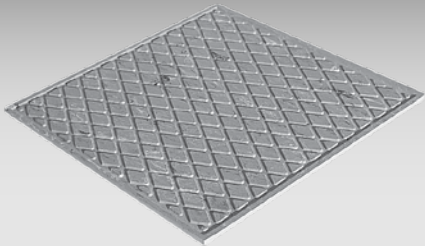

Diamond Landing Rubber Tile


order prefix: **DSA**

GAUGE	3/16"
SIZE	27" x 27"
PIECES /CTN	6
WEIGHT /CTN (LB)	40.2
SQ FT /CTN	30.37



Rubber risers, stringers, landing tiles, assurance detectable warning tile (ADWT) and other accessories make up the common denominators for use with FLEXCO® rubber stair treads.

> Diamond pattern landing tiles are available in Evolving Styles®, SpexTones™ and FlexTones® colors to match our stair treads.

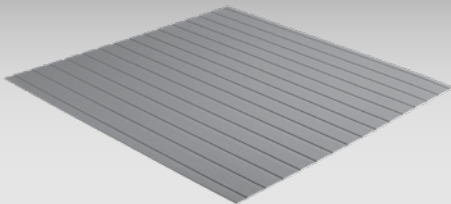

Warning Tile

order prefix: **ADWT**

GAUGE	1/8"	1/8"	1/8"
SIZE	12" x 12"	12" x 36"	36" x 36"
WEIGHT /CTN (LB)	50	60	60
SQ FT /CTN	45	54	54





Assurance detectable warning tile features deeply set, pre-grooved strips which can be "felt" through a cane or walking device to alert the visually impaired of approaching stairways.

> Meets ANSI A117.1/705.3.3 for detectable warnings on walking surfaces.



Warning Tile Colors



Smooth + Ribbed Rubber Inserts

FLEXCO® stair treads with smooth and ribbed inserts provide a tactile surface that's durable and easy to clean. In addition, the low-profile 2" strips are available in FlexTones® colors and 075 Canary for easy coordination with our wall base, tiles, risers, stringers and accessories.

> Available in FlexTones® colors plus Canary Yellow.

> Ideal for vinyl treads as well as all rubber tread in profiles.


> Available to meet ADA requirements for contrasting color.

> Canary smooth and ribbed inserts meet OSHA safety standards.

> Meets California state standard code Title 24, Section 2-3306 (R).

smooth order prefix: **SVI**

ribbed order prefix: **RVI**

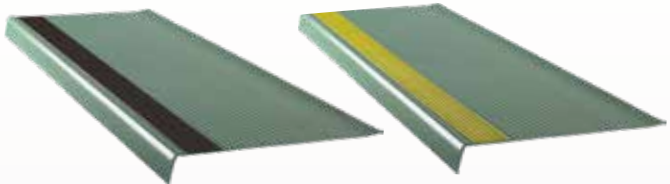

Abrasive Strips

order prefix: **GRIT**

Rubber and vinyl stair treads with abrasive grit strips are available in Glow-in-the-Dark and other colors to meet OSHA, ADA, CA Title 24 and DIN requirements. The 3/4" strips for the 130 treads are available in black only and the 2" strips are available in all colors listed below.

> Available to meet ADA requirements for contrasting color.

> Yellow stripping meets OSHA safety standards.

> Glow-in-the-Dark luminescent safety strips meet DIN 67510.

> Meets California state standard code Title 24, Section 2-3306 (R).


Abrasive Grit Strip Colors



Color selections must be made from actual samples.

Smooth + Ribbed Rubber Insert Strip Colors

Smooth + ribbed rubber inserts are available in all 57 FlexTones® colors shown, plus Canary Yellow.

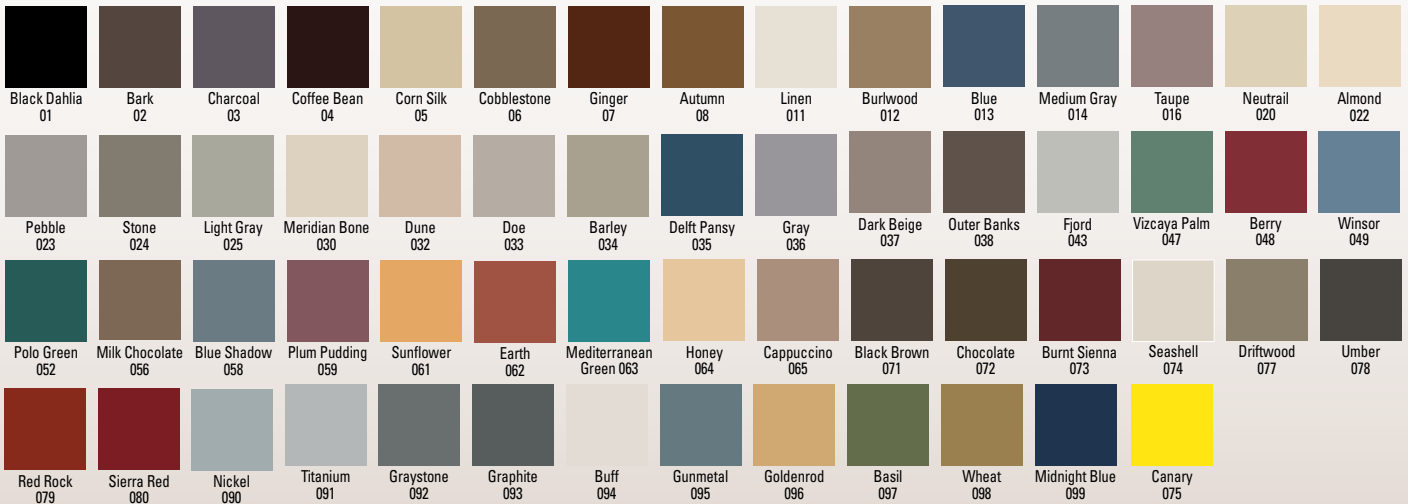



FLEXCO®

Wall Base

R U B B E R + V I N Y L

It's the perfect finishing touch. The final element of style to transition your look from wall to floor.

And FLEXCO® provides the fine design lines to enhance your space with color, durability and added dimension. From the smooth runs of Wallflowers® that conform to curves and angles with ease, to the many faces of Base Sculptures™, FLEXCO® wall base brings a room together.

FLEXCO®
AMERICAN-MADE FLOORING

Wallflowers®



Wood Elements™



Base Sculptures™



Base 2000™



Vinyl



Health Design™



Wallflowers®

P R E M I U M R U B B E R W A L L B A S E

FLEXCO®
5
TOP

- 1** Type TS vulcanized rubber
- 2** Superior finish, resists scuffing and gouging
- 3** FlexOne pricing – solid colors all one price
- 4** Will not shrink – dimensionally stable
- 5** Homogeneous color



W

allflowers® is the highest quality thermoset – Type TS – vulcanized rubber base on the market. It retains its visual appeal and color over the long term with very little maintenance, so it's perfect for minimizing life cycle costs.

FLEXCO®
AMERICAN-MADE FLOORING

Wallflowers® C O L O R S



The Wallflowers® colors shown include all 57 FlexTones® colors (see page 11) to match rubber floor tiles, stair treads, ribbed inserts, risers, stringers and accessories. Wallflowers® are also available 018 Baby's Breath, 029 Arctic White, 046 True White and 089 Antique White.

Complete specs on pages 84-85.

R U B B E R W A L L B A S E

FLEXCO
AMERICAN-MADE FLOORING

Wood Elements™

WALL BASE

FLEXCO
5
TOP

- 1 **Type TP thermoplastic rubber**
- 2 **Resilient rubber-vinyl blend provides good flexibility**
- 3 **Durable finish**
- 4 **Dimensionally stable**
- 5 **Precise gauging and a durable laminated finish**

floor
score



Made in the
U.S.A.

Wood Elements™
COLORS



Simply Cherry
WEC-104



Vintage Pecan
WEC-105



Amber Maple
WEC-106



Classic Oak
WEC-107

W


ith FLEXCO® Wood Elements™ wall base, you get a thermoplastic Type TP rubber base that gives you the look of true wood base and the many benefits of rubber base at a lower price than wood molding. It's everything you need to create unique and eye-catching flooring designs.

Complete specs on page 86.

Base Sculptures™

WALL BASE SYSTEM

- 1 Type TP thermoplastic rubber
- 2 40' seamless rolls available in 4 profiles (Harmony, Merit, Charisma and Reflection) for seamless installations; all other profiles available in 8' lengths
- 3 Color-coordinated inside and outside corner blocks
- 4 FlexOne pricing – solid colors all one price
- 5 Paintable surface for infinite color possibilities

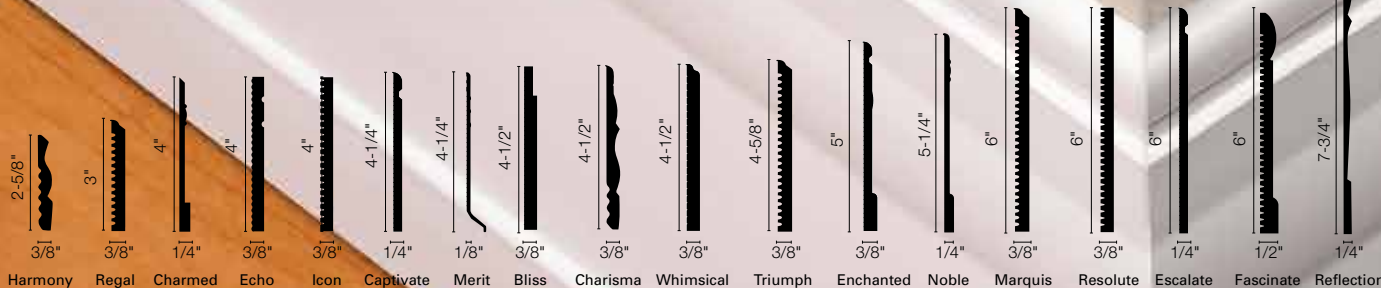

Base Sculptures™ COLORS

Black Dahlia 01	Bark 02	Charcoal 03	Coffee Bean 04	Corn Silk 05
Cobblestone 06	Ginger 07	Autumn 08	Linen 011	Burlwood 012
Blue 013	Medium Gray 014	Taupe 016	Baby's Breath 018	Neutral 020
Almond 022	Pebble 023	Stone 024	Light Gray 025	Arctic White 029
Meridian Bone 030	Dune 032	Doe 033	Barley 034	Delft Pansy 035
Gray 036	Dark Beige 037	Outer Banks 038	Fjord 043	True White 046
Vizcaya Palm 047	Berry 048	Winsor 049	Polo Green 052	Milk Chocolate 056
Blue Shadow 058	Plum Pudding 059	Sunflower 061	Earth 062	Mediterranean Green 063
Honey 064	Cappuccino 065	Black Brown 071	Chocolate 072	Burnt Sienna 073
Seashell 074	Driftwood 077	Umber 078	Red Rock 079	Sierra Red 080
Antique White 089	Nickel 090	Titanium 091	Graystone 092	Graphite 093
Buff 094	Gunmetal 095	Goldenrod 096	Basil 097	Wheat 098
Midnight Blue 099				

The Base Sculptures™ colors shown include all 57 FlexTones® colors (see page 11) to match rubber floor tiles, stair treads, ribbed inserts, risers, stringers and accessories. The Base Sculptures™ palette also includes 018 Baby's Breath, 029 Arctic White, 046 True White and 089 Antique White.

Complete specs on pages 86-87.

Made better to make you look better. In today's world where expectations are high and product performance is required, FLEXCO® Base Sculptures™ are the ideal choice. Available in 61 colors and 18 distinct profiles, FLEXCO gives you the ultimate in creative flexibility.



Base 2000™

WALL BASE

FLEXCO®

5
TOP

- 1 **Type TP thermoplastic rubber**
- 2 **Resilient rubber-vinyl blend provides good flexibility**
- 3 **Dimensionally stable**
- 4 **Precise gauging and uniform height conceal floor and wall irregularities**
- 5 **FlexOne pricing – solid colors all one price**



Made in the
U.S.A.

FLEXCO®
AMERICAN-MADE FLOORING

Base 2000™ COLORS

Black Dahlia 01	Bark 02	Charcoal 03	Coffee Bean 04	Corn Silk 05
Cobblestone 06	Ginger 07	Autumn 08	Linen 011	Burlwood 012
Blue 013	Medium Gray 014	Taupe 016	Baby's Breath 018	Neutrail 020
Almond 022	Pebble 023	Stone 024	Light Gray 025	Arctic White 029
Meridian Bone 030	Dune 032	Doe 033	Barley 034	Delft Pansy 035
Gray 036	Dark Beige 037	Outer Banks 038	Fjord 043	True White 046
Vizcaya Palm 047	Berry 048	Winsor 049	Polo Green 052	Milk Chocolate 056
Blue Shadow 058	Plum Pudding 059	Sunflower 061	Earth 062	Mediterranean Green 063
Honey 064	Cappuccino 065	Black Brown 071	Chocolate 072	Burnt Sienna 073
Seashell 074	Driftwood 077	Umber 078	Red Rock 079	Sierra Red 080
Antique White 089	Nickel 090	Titanium 091	Graystone 092	Graphite 093
Buff 094	Gunmetal 095	Goldenrod 096	Basil 097	Wheat 098
Midnight Blue 099				

The Base 2000™ colors shown include all 57 FlexTones® colors (see page 11) to match rubber floor tiles, stair treads, ribbed inserts, risers, stringers and accessories. Base 2000™ is also available in 018 Baby's Breath, 029 Arctic White, 046 True White and 089 Antique White.

Complete specs on pages 84-85.

Vinyl

WALL BASE



- 1 **Type TV vinyl**
- 2 **Economical wall base option**
- 3 **FlexOne pricing – solid colors all one price**
- 4 **Superior finish resists scuffing and gouging**
- 5 **Homogenous color**



FLEXCO® Vinyl Type TV wall base offers a superior color finish and quality construction, yet it's made from vinyl, which makes it more economical than rubber for certain applications. When you're looking to save some expense, look no further than FLEXCO® vinyl. No limitations means just that: all wall base sizes are available in all colors, and no matter which shade you choose, all colors in each line are all priced the same.

Robert F. Kennedy Community School,
Los Angeles, California
Complete specs on page 85.



Vinyl Wall Base C O L O R S

Black Dahlia 01	Bark 02	Charcoal 03	Coffee Bean 04	Corn Silk 05
Cobblestone 06	Ginger 07	Autumn 08	Linen 011	Burlwood 012
Blue 013	Medium Gray 014	Taupe 016	Baby's Breath 018	Neutrail 020
Almond 022	Pebble 023	Stone 024	Light Gray 025	Arctic White 029
Meridian Bone 030	Dune 032	Doe 033	Barley 034	Delft Pansy 035
Gray 036	Dark Beige 037	Outer Banks 038	Fjord 043	True White 046
Vizcaya Palm 047	Berry 048	Winsor 049	Polo Green 052	Milk Chocolate 056
Blue Shadow 058	Plum Pudding 059	Sunflower 061	Earth 062	Mediterranean Green 063
Honey 064	Cappuccino 065	Black Brown 071	Chocolate 072	Burnt Sienna 073
Seashell 074	Driftwood 077	Umber 078	Red Rock 079	Sierra Red 080
Antique White 089	Nickel 090	Titanium 091	Graystone 092	Graphite 093
Buff 094	Gunmetal 095	Goldenrod 096	Basil 097	Wheat 098
Midnight Blue 099				

The Vinyl Wall Base colors shown include all 57 FlexTones® colors (see page 11) to match rubber floor tiles, stair treads, ribbed inserts, risers, stringers and accessories. Vinyl Wall Base is also available in 018 Baby's Breath, 029 Arctic White, 046 True White and 089 Antique White.

Health Design™

W A L L B A S E



- 1 Type TP thermoplastic rubber
- 2 Available in 6' lengths
- 3 1/8" tapers to .080" gauge for use with multiple types of flooring
- 4 6" Height for better protection of wall surfaces
- 5 Heat-weldable for seamless floor installation



A

A seamless look that is cleaner in every way. In healthcare settings, the place where the floor meets the wall is critical. Not only for aesthetics, but for cleanliness. Health Design Wall Base gives you a seam that looks clean - and is clean. Bacteria stays out, and you get a seamless look with easy installation.

FLEXCO®
AMERICAN-MADE FLOORING

Health Design™ Wall Base C O L O R S



Black Dahlia
01

Bark
02



Medium Gray
014

Baby's Breath
018



Almond
022

Arctic White
029



Dune
032

Delft Pansy
035



Dark Beige
037

Vizcaya Palm
047



Winsor
049

Blue Shadow
058



Black Brown
071

Red Rock
079



Sierra Red
080


R U B B E R
W A L L B A S E

Vanderbilt Hospital, Nashville, Tennessee
Complete specs on page 86.


Wallflowers® order prefix: **WF**

GAUGE	1/8"
WALL HEIGHTS	2-1/2", 4", 4-1/2" and 6"
LENGTHS	48" lengths and 120' rolls
LIN FT/CTN	120' (lengths or rolls)
CORNERS/CTN	30
WEIGHT /CTN (LB)	
2-1/2" COVE	30
2-1/2" STRAIGHT	26
4" COVE	48
4" STRAIGHT	43
4-1/2" COVE	50
6" COVE	69
6" STRAIGHT	69

Cove

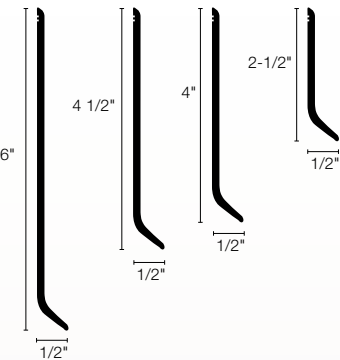


Straight




Base 2000™ order prefix: **B2**

GAUGE	1/8"
WALL HEIGHTS	2-1/2", 4", 4-1/2" and 6"
LENGTHS	48" lengths and 120' rolls
LIN FT/CTN	120' (lengths or rolls)
CORNERS/CTN	30
WEIGHT /CTN (LB)	
2-1/2" COVE	27
2-1/2" STRAIGHT	26
4" COVE	39
4" STRAIGHT	38
4-1/2" COVE	45
4-1/2" STRAIGHT	45
6" COVE	60
6" STRAIGHT	60

Cove




Straight




Vinyl order prefix: **VCB**

GAUGE	1/8" or .080"
WALL HEIGHTS	2-1/2", 4", and 6"
LENGTHS	48" lengths and 120' rolls
LIN FT/CTN	120' (lengths or rolls)
CORNERS/CTN	30
WEIGHT /CTN (LB)	1/8" .080"
2-1/2" COVE	30 20
2-1/2" STRAIGHT	26 22
4" COVE	40 32
4" STRAIGHT	43 32
6" COVE	69 50
6" STRAIGHT	69 52

Cove

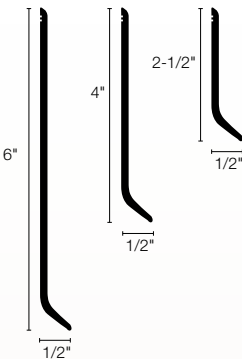

Straight




Rubber Corner Blocks (INSIDE & OUTSIDE)

HEIGHT	Pcs /Ctn	Lbs /Ctn	
2-3/4"	15	1.65	Custom height orders
4-1/4"	15	2.10	available in 1/2" increments.
6-1/4"	15	3.00	


Mini Corners (FOR STRAIGHT BASE ONLY)

HEIGHT	Pcs /Ctn	Lbs /Ctn	Lbs /Ctn
		Inside	Outside
2-3/4"	15	0.67	0.77
4-1/4"	15	1.04	1.18
6-1/4"	15	1.53	1.74

Rubber Corner Blocks



Mini Corners




Rubber & Vinyl Wall Base & Corners
Recommended Adhesives


WB-600 Acrylic Wall Base Adhesive
C-630 Contact Adhesive

*For non-porous surfaces, use premium-grade, brush-on contact cement.

Wall Base Configurations




Straight base for
use with carpets



Cove base for
hard-surface floors

Color-matched inside and
outside corners available

Corners are not available
for the following:
4-1/2" or 6" inside corners (IC)
6" outside flat corners (OC)




120' rolls available
for seamless
installation





Wood Elements™ order prefix: **WEC**

GAUGE	1/8"
WALL HEIGHTS	4"
LENGTHS	48" lengths and 120' rolls
LIN FT/CTN	120' (lengths or rolls)
CORNERS/CTN	30
WEIGHT /CTN (LB)	
4" COVE	44



Health Design™ order prefix: **HDB**

GAUGE	1/8" tapers to .080"
WALL HEIGHTS	6"
LENGTHS	72" lengths
LIN FT/CTN	36'
CORNERS/CTN	4
WEIGHT /CTN (LB)	
WALL BASE	34
CORNERS	4

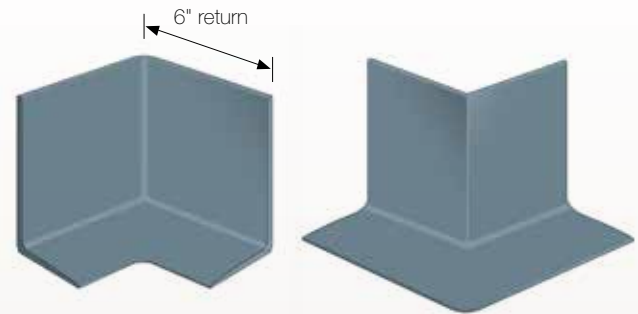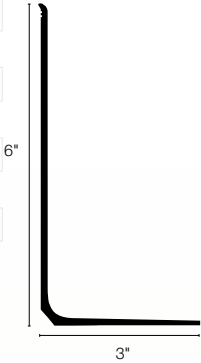

Color-matched
inside and outside
corners available

Base Sculptures™ See below for order prefixes.

GAUGE	1/8" to 1/2" nominal
WALL HEIGHTS	2-5/8", 3", 4", 4-1/4", 4-1/2", 4-5/8"
LENGTHS	40' rolls or 8' lengths
LIN FT/CTN	40'
CORNERS/CTN	15
WEIGHT /CTN (LB)	
SC HARMONY	25 40' roll
SMT MERIT	16 40' roll
SC CHARISMA	40 40' roll
SC REFLECTION	45 40' roll
SCR REGAL	29 8' pcs, 5 pcs per ctn
SCH CHARMED	27 8' pcs, 5 pcs per ctn
SEC ECHO	37 8' pcs, 5 pcs per ctn
SCI ICON	40 8' pcs, 5 pcs per ctn
SCC CAPTIVATE	40 8' pcs, 5 pcs per ctn
SCC BLISS	44 8' pcs, 5 pcs per ctn
SCW WHIMSICAL	45 8' pcs, 5 pcs per ctn
SCT TRIUMPH	47 8' pcs, 5 pcs per ctn
SCN ENCHANTED	37 8' pcs, 5 pcs per ctn
SNB NOBLE	24 8' pcs, 5 pcs per ctn
SCM MARQUIS	58 8' pcs, 5 pcs per ctn
SCE ESCALATE	27 8' pcs, 5 pcs per ctn
SRE RESOLUTE	60 8' pcs, 5 pcs per ctn
SCF FASCINATE	63 8' pcs, 5 pcs per ctn




Corners


for Base Sculptures

Rubber Corner Blocks

HEIGHT	Pcs /Ctn	Lbs /Ctn
	Inside & Outside	
4-3/4"	15	2.35
8"	15	3.84




Custom height orders
available in 1/2" increments.

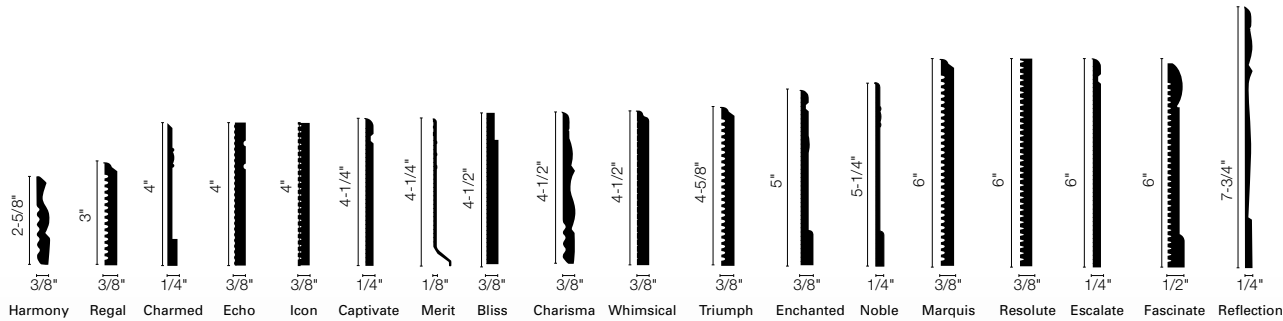

Rubber & Vinyl Wall Base & Corners Recommended Adhesives


WB-600 Acrylic Wall Base Adhesive
C-630 Contact Adhesive

*For non-porous surfaces, use premium-grade,
brush-on contact cement.



166 Quarter Round Trim

Now designers have another option that outperforms wood and raises the aesthetic level of any application, including Base Sculptures. FLEXCO® 1/2" x 1/2" Quarter Round trim is the perfect finishing touch for many wall base installations and available by request. Quarter Round trim packs as 1-40 ft./roll or in 10-12 ft. sections.



Welding Beads

R U B B E R + V I N Y L

The FLEXCO® Unitized Installation System allows rubber and vinyl tile to be seamlessly installed as a one-piece floor. Pre-grooved floor tiles are fused together with welding beads in matching or contrasting colors. The process is easy, fast and permanent, and the result is a completely seamless “unitized” floor. Welding beads are ideal in areas that have stringent requirements for added hygiene, including operating theaters, laboratories, clean rooms and other areas subjected to continual and extensive wet cleaning. Note: For 36" x 36" rubber and vinyl tiles, square feet divided by 600 equals number of rolls needed. For 24" x 24" tiles, divide by 400 (400 lin. ft. /roll). 50' rolls are also available for use with Health Design Wall Base.

Rubber order prefix: **WBR**

FLEXCO® Rubber Welding Beads are available in matching or contrasting colors for rubber tiles or sheets that can be welded.

						
White WBR-1	French Gray WBR-3	Black WBR-9	Medium Beige WBR-19	Bone White WBR-22	Beige WBR-23	Blue WBR-31
						
Light Plum WBR-10	Red WBR-11	Light Sage WBR-12	Dark Blue WBR-13	Dark Plum WBR-14	Honey WBR-15	Dark Honey WBR-16
						
Dark Mediterranean Green WBR-18	Light Charcoal WBR-24	Light Gray WBR-25	Light Blue WBR-26	Light Beige WBR-29	Light French Gray WBR-33	Delft Pansy WBR-35
						
Light Cherry WBR-37	Dark Cherry WBR-38	Light Oak WBR-39	Dark Oak WBR-40	Light Pecan WBR-41	Dark Pecan WBR-42	Light Maple WBR-44
						
Dark Maple WBR-45	Dark Gray WBR-46	Sage WBR-50	Mediterranean Green WBR-63	Charcoal WBR-43		


Vinyl order prefix: **WBV**

FLEXCO® Vinyl Welding Beads are available in matching or contrasting colors for solid vinyl tile and ESD static control vinyl tiles.

						
Rain Shower WBV-11	Fog WBV-12	Smoke WBV-13	Sand Storm WBV-20	Spring Green WBV-24	Cool Cucumber WBV-25	White/Gray WBV-40
						
Gray WBV-42	Ivory WBV-43	Light Beige WBV-47	Steel Gray WBV-48	Brassila Sky WBV-52	Amazon Blue WBV-56	Warm Gray WBV-65
						
Charcoal WBV-66	White/Blue WBV-69	Spruce WBV-70	Black WBV-001	Beige WBV-125	White WBV-180	Brown WBV-200
						
Light Gold WBV-635	Medium Gray WBV-640	Cream WBV-650	Light Gray WBV-660	Haze WBV-19	Bark WBV-02	Medium Gray WBV-014
						
Baby's Breath WBV-018	Almond WBV-022	HD Light Gray WBV-025	Arctic White WBV-029	Dune WBV-032	Delft Pansy WBV-035	Dark Beige WBV-037
						
Vizzaya Palm WBV-047	Winsor WBV-049	Sage WBV-050	Blue Shadow WBV-058	Earth WBV-062	Black Brown WBV-071	Red Rock WBV-079



> Welding Beads are .160" (4mm) in size.



Pre-grooved 24" x 24" and 36" x 36" tile speeds installation.




Welding bead is placed in the groove and fused by heat application.



Welding bead is trimmed in two steps, with an initial trim using a trim plate.



FLEXCO® tile may be installed as self-cove.

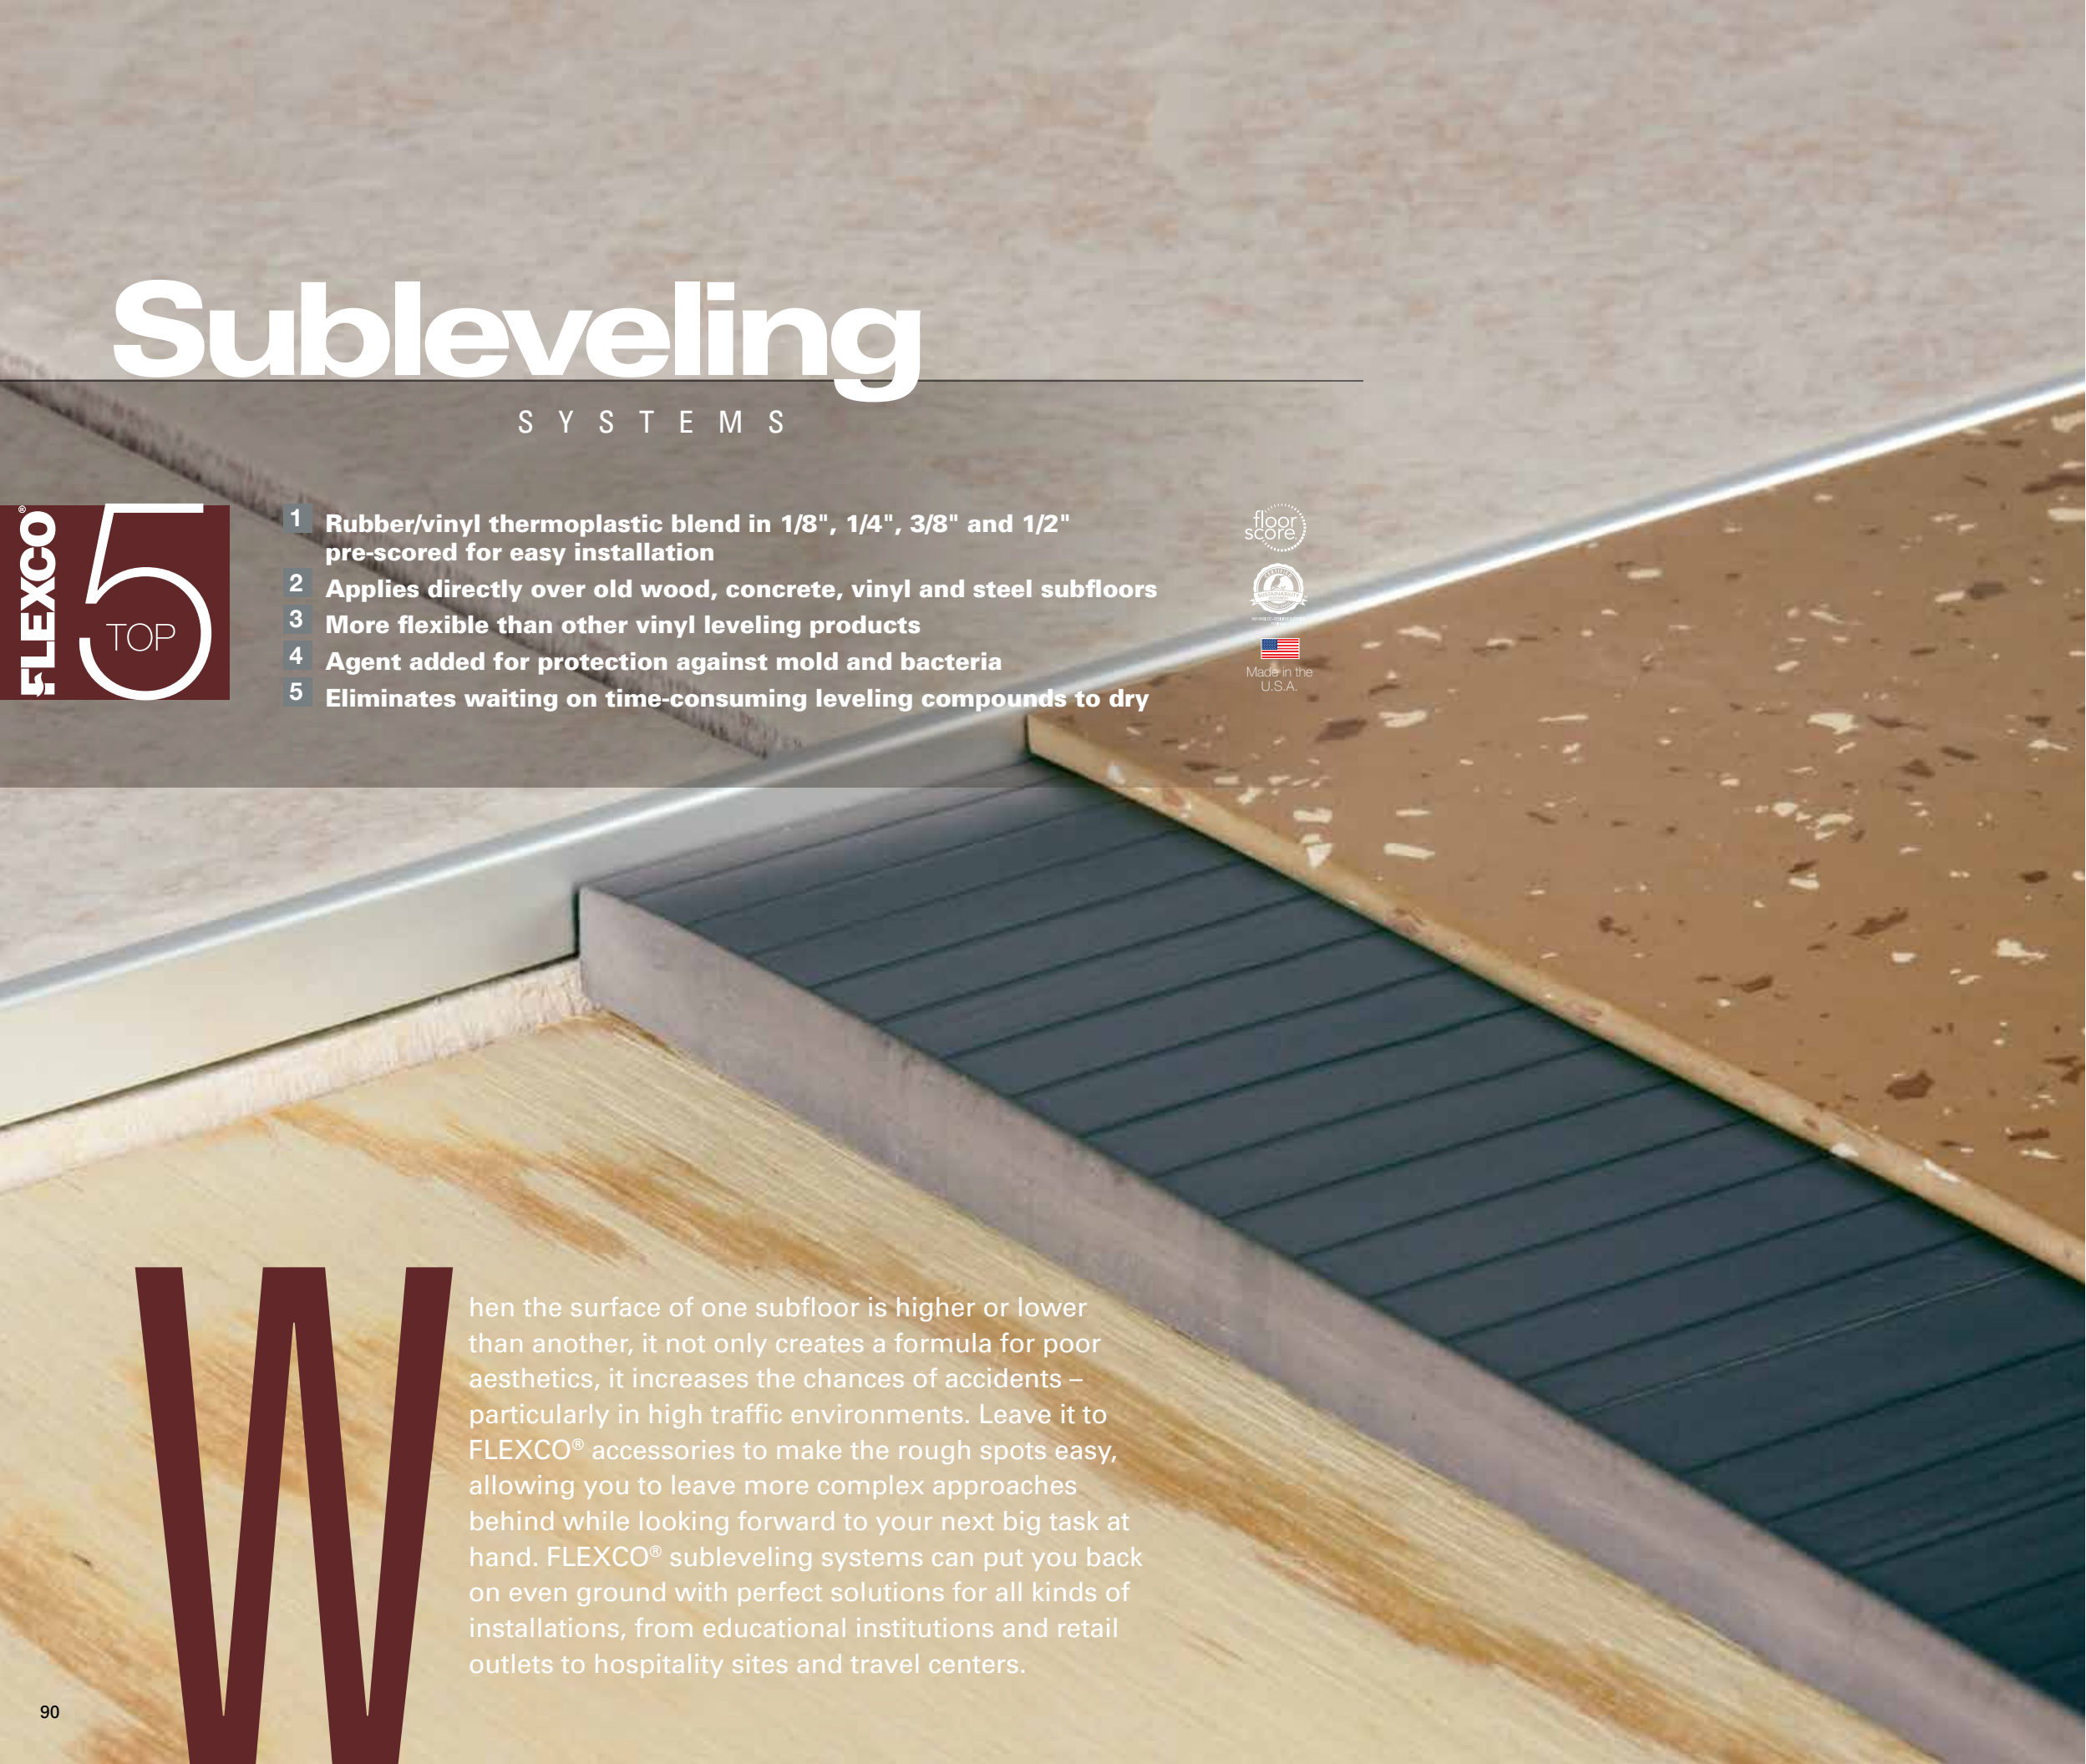

Subleveling

S Y S T E M S



- 1 Rubber/vinyl thermoplastic blend in 1/8", 1/4", 3/8" and 1/2" pre-scored for easy installation
- 2 Applies directly over old wood, concrete, vinyl and steel subfloors
- 3 More flexible than other vinyl leveling products
- 4 Agent added for protection against mold and bacteria
- 5 Eliminates waiting on time-consuming leveling compounds to dry



When





the surface of one subfloor is higher or lower than another, it not only creates a formula for poor aesthetics, it increases the chances of accidents – particularly in high traffic environments. Leave it to FLEXCO® accessories to make the rough spots easy, allowing you to leave more complex approaches behind while looking forward to your next big task at hand. FLEXCO® subleveling systems can put you back on even ground with perfect solutions for all kinds of installations, from educational institutions and retail outlets to hospitality sites and travel centers.



Subleveling Systems

S P E C I F I C A T I O N S

Item	Gauge	Size	Scoring	Number/ Carton	Wt./ Carton
1/4" Reducer	1/4" taper to .040"	12" x 48"	3/32", 1/8", 3/16"	8	37 lbs.
3/8" Reducer	3/8" taper to .040"	12" x 48"	3/32", 1/8", 3/16", 1/4", 5/16"	8	65 lbs.
1/8" Reducer	1/8" taper to .040"	12" x 48"		16	52 lbs.
1/2" Reducer	1/2" taper to .040"	18" x 48"	3/32", 1/8", 3/16", 1/4", 5/16", 3/8"	4	72 lbs.

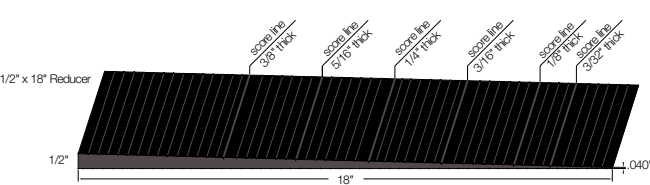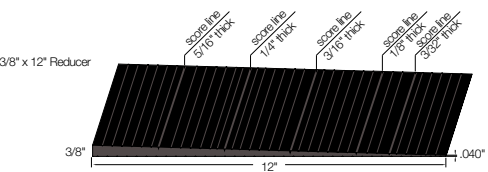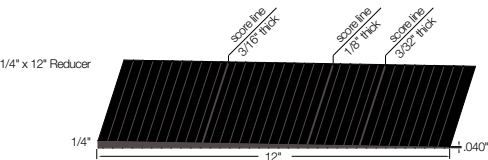

Color varies due to recycled content.



Subleveling Systems Recommended Adhesives
AW-510 Acrylic Adhesive
MS-700 Modified Silane Wet-Set Adhesive
EW-710 Epoxy Wet-Set Adhesive

FLEXCO® vinyl accessories put the finishing touch on any project. Available in many different styles and 57 FlexTones® colors, it's easy to coordinate them with our tile, stair treads and wall base.

Features and Benefits

- > Available in 57 FlexTones® colors which coordinate with tiles, wall base and treads (except accessories 101, 102, 140, 141, 194 and 195).
- > FlexOne pricing – solid colors all one price.
- > All adapters, reducers and thresholds meet ADA requirements for transitioning from one floor to another.

Recommended Adhesives for Stair Nosings


EN-610 Epoxy Nose Filler Adhesive

Recommended Adhesives for Accessories Prior To / Following Floor Installation


EN-610 Epoxy Nose Filler Adhesive
C-630 Contact Adhesive
EW-710 Epoxy Wet-Set Adhesive

Recommended Adhesives for Accessories During Floor Installation


AW-510 Acrylic Adhesive
MS-700 Modified Silane Wet-Set Adhesive
EW-710 Epoxy Wet-Set Adhesive



193 | Corner Guard
2-1/4" return corner protector
Colors: FlexTones
Packing /Ctn: 6 / 54" sections




101 | Aluminum Single Flange Track
Smooth single flange used with snap-down dividers
Packing /Ctn: 12 / 12' sections




102 | Plastic Single Flange Track
Plastic single flange used with snap-down dividers
Colors: Black only
Packing /Ctn: 10 / 12' sections


Adapters/Transitions




160 | 3/8" Ceramic/Wood Carpet Transition
Molding for joining 5/16" carpet to 3/8" ceramic/wood flooring
Colors: FlexTones
Packing /Ctn: 10 / 12' sections




163 | Snap-Down T Edge Divider
Joins carpets
Colors: FlexTones
Packing /Ctn: 20 / 12' sections




167 | Tile and Carpet Joiner
Joins 1/4" carpet to 1/8" tile
Colors: FlexTones
Packing /Ctn: 5 / 12' sections




161 | Snap-Down Edging
1-1/4" wide removable section joins tile to wood
Colors: FlexTones
Packing /Ctn: 20 / 12' sections



162 | Snap-Down Divider Joins carpet to tile
Colors: FlexTones
Packing /Ctn: 20 / 12' sections




164 | Snap-Down Super Edge
1-7/8" wide removable section joins carpet to wood/ceramic
Colors: FlexTones
Packing /Ctn: 5 / 12' sections




168 | Resilient-to-Carpet Transition
Provides smooth carpet-to-tile transition
Colors: FlexTones
Packing /Ctn: 20 / 12' sections


Edge Guards




183 | 1/4" Transition Edge Guard
1/4" butting gauge undercut
Colors: FlexTones
Packing /Ctn: 5 / 12' sections



184 | 5/16" Transition Edge Guard
5/16" butting gauge undercut
Colors: FlexTones
Packing /Ctn: 5 / 12' sections




185 | 3/16" Transition Edge Guard
Undercut, flange and transition combined
Colors: FlexTones
Packing /Ctn: 20 / 12' sections




186 | 1/4" Carpet Edge Guard
Undercut 1/4" with 2" transition
Colors: FlexTones
Packing /Ctn: 10 / 12' sections


Cove Caps




174 | Tapered Carpet Cove Cap
Trim for coved carpet
Colors: FlexTones
Packing /Ctn: 20 / 12' sections



175 | Square Carpet Cove Cap
Cove cap for 1/4" carpet
Colors: FlexTones
Packing /Ctn: 40 / 12' sections




197 | Square Resilient Cove Cap
1/8" square cap for coved sheet vinyl
Colors: FlexTones
Packing /Ctn: 50 / 12' sections




197R | Tapered Resilient Cove Cap
Cap for coved sheet goods or vinyl tile
Colors: FlexTones
Packing /Ctn: 50 / 12' sections


Stair Nosings




171 | Carpet Stair Nosing
Undercut nosing for 1/4" and 5/16" carpet
Colors: FlexTones
Packing /Ctn: 5 / 12' sections




189 | Top Set Stair Nosing
Square nose for light-duty applications
Colors: FlexTones
Packing /Ctn: 5 / 12' sections



187 | Lap Type Square Stair Nosing
Lap type for butting 1/8" tile
Colors: FlexTones
Packing /Ctn: 10 / 12' sections




201 | Overlap Stair Nosing
Square nosing, ribbed safety surface
Colors: FlexTones
Packing /Ctn: 10 / 12' sections




202 | Double-Butt Carpet Stair Nosing
Butt to 1/4" carpet
Colors: FlexTones
Packing /Ctn: 5 / 12' sections


Fillets/Tub Mouldings




140 | 1" Tub Moulding
High-gloss, self-stick finish cove for bathtub, counters and shelves
Colors: White or Almond
Packing /Ctn: 24 / 5' sections



141 | 1-1/2" Tub Moulding
High-gloss, self-stick finish cove for bathtub, counters and shelves
Colors: White or Almond
Packing /Ctn: 24 / 5' sections




194 | Fillet Moulding
Superb backing for flashing up the wall
Colors: White only
Packing /Ctn: 25 / 5' sections




195 | Cove Stick Fillet
Superb backing for flashing up the wall
Colors: Black only
Packing /Ctn: 10 / 12' sections


Reducers




156 | Underslung Reducer
Binder-bar edging for resilient flooring undercut
Colors: FlexTones
Packing /Ctn: 2 / 35' coils




177A | 3/8" Carpet Edge Reducer
Designed especially for carpet
Colors: FlexTones
Packing /Ctn: 10 / 12' sections



158 | 3/8" Carpet Edge Reducer
Designed especially for 3/8" carpet
Colors: FlexTones
Packing /Ctn: 10 / 12' sections



177B | 5/16" Carpet Edge Reducer
Reducer for 5/16" material including FlexTuff®
Colors: FlexTones
Packing /Ctn: 10 / 12' sections



157 | 1/2" Reducer
For carpet, ceramic tile or wood floors
Colors: FlexTones
Packing /Ctn: 10 / 12' sections



192A | 1/8" Tile Reducer Strip
Beveled edge for resilient flooring material
Colors: FlexTones
Packing /Ctn: 50 / 3' sections

Adhesives

FOR TILE, TREAD + WALL BASE



Color-Matched Caulks

FLEXCO® color-matched caulks are in stock to coordinate with the colors in our FlexTones® color matching system. They're ideal for touch-ups or hiding installation gaps. Custom colors to match other colors in the line are available.



ile. Sheet. Wall base. Stair treads. Optimum performance starts with quality installation, and Excelsior™ Adhesives position you to get expected results time after time. They're the perfect match for our products and your production schedule.



Spread Rates

SP-500 Acrylic Aerosol Pressure-Sensitive Adhesive

CASE QTY

Acrylic aerosol pressure-sensitive adhesive used for installation of LVT and rubber flooring products. Water-based and VOC free, it is highly aggressive with high resistance to moisture and plasticizers. It has excellent initial grab and shear strength making it ideal for fast track construction and commercial installations.

Coverage: Rubber Flooring – 100 sq. ft. per unit; Vinyl Flooring – 150 sq. ft. per unit.

AW-510 Acrylic Adhesive

G 4

Acrylic adhesive used for the permanent installation of dimensionally stable vinyl, rubber and quartz flooring products. Water-based, low VOC and solvent-free, yet highly aggressive with a high resistance to moisture and plasticizer migration. Adhesive is suitable for heavy traffic or rolling loads and is easy to clean up.

Porous Coverage 160 sq.ft. per gallon / Non-porous Coverage 225 sq.ft. per gallon.

AP-520 Acrylic Roll/Trowelable Pressure-Sensitive Adhesive

3

Acrylic, roller or trowel applied pressure-sensitive adhesive products. It is water-based and VOC free, yet highly aggressive with high resistance to moisture and plasticizers. Suitable for heavy traffic of rolling loads. After installation flooring is immediately usable when using AP-520 and can be immediately heat welded.

Roller Coverage: 1200 sq. ft. per unit

Trowel Coverage: 675 sq. ft. per unit

WB-600 Acrylic Wall Base Adhesive

C G 4

Solvent-free, high performance, acrylic wet-set adhesive specifically designed for permanent installation of rubber, TPR and vinyl wall base products and pre-formed corners on vertical surfaces.

Trowel Coverage: 180-340 lin. ft. per gallon depending on trowel/base size

Cartridge Coverage: 30-70 lin. ft. per cartridge depending on base size

EN-610 Epoxy Nose Filler Adhesive

C

Two-component, solvent-free epoxy caulk adhesive designed for use with indoor installations of stair treads, risers, and stair nosings. Designed to prevent flex, indentation and premature wear or damage to rubber or vinyl stair treads and stair nosings.

½" Coverage: 25 lin. ft. per cartridge

¾" Coverage: 50 lin. ft. per cartridge

TP-620 Pressure-Sensitive Tape Adhesive

CASE QTY

Solvent-free, pressure-sensitive tape-based adhesive designed for use with indoor installations of stair treads, risers, stringers and cove fillet sticks. It is designed specifically to permanently adhere rubber or vinyl products. Allows for installations to resume use immediately.

Dimensions: 1" x 164' (6 per case); 4" x 164' (3 per case); 9.5" x 164' (1 per case)

C-630 Contact Adhesive

Q

VOC free, water-based contact adhesive used for the permanent installation of vinyl and rubber resilient flooring, stair treads, wall base, flash coving and accessories in horizontal or vertical installations. Highly aggressive, it has a high resistance to moisture and plasticizers.

Coverage: 20-40 sq. ft. per unit; 120-140 lin. ft. per unit

MS-700 Modified Silane Wet-Set Adhesive

3

Premium one component modified silane adhesive used for permanent installation of vinyl & rubber flooring products, including recycled or crumb rubber flooring products. It can be installed over porous and non-porous substrates in indoor and outdoor applications, allowing for installation of flooring materials in entrances or areas that are not temperature controlled.

Crumb Rubber Coverage: 135-160 sq. ft. per gallon

Porous Coverage: 160 sq. ft. per gallon

Non-Porous Coverage: 235 sq. ft. per gallon

EW-710 Epoxy Wet-Set Adhesive

G

Non-flammable two-part urethane-modified epoxy adhesive used for permanent indoor installation of vinyl, rubber and quartz flooring products. It is low VOC and solvent-free, yet highly aggressive and cures to an incredibly hard, chemically resistant film for superior adhesive. It can be installed over porous and non-porous substrates in indoor and outdoor applications, allowing for installation of flooring materials in entrances or areas that are not temperature controlled.

Crumb Rubber Coverage: 120 sq. ft. per gallon

Smooth Porous & Non-Porous Coverage: 150 sq. ft. per gallon

Rough Porous Coverage: 135 sq. ft. per gallon

ASD-800 Acrylic Wet-Set ESD Adhesive

G

Acrylic wet-set adhesive designed for indoor installation of ESD vinyl and rubber flooring. When installed in conjunction with ESD tile and a grounding source, it will help dissipate static and electrical discharges to protect electrically sensitive equipment.

Coverage: 160 sq. ft. per gallon

USD-810 Urethane Wet-Set ESD Adhesive

G

Two-part, solvent-free urethane adhesive used for the permanent installation of ESD vinyl and rubber flooring products. Low VOC and solvent-free, yet highly aggressive and cures to a flexible ESD film for superior adhesion. Ideal for areas with heavy use, machinery or rolling loads.

Smooth Porous & Non-Porous Coverage: 150 sq. ft. per gallon

Rough Porous Coverage: 135 sq. ft. per gallon

Installation

PRODUCTS



Proper subfloor preparation is the key to great looking and long-lasting floors. These Excelsior™ installation products and underlayments help you achieve your flooring goals.

Spread Rates

MM-100 Moisture Mitigation 2.5

Water, solvent and VOC-free, polyurethane-based moisture mitigation product used to treat concrete slabs with excessive moisture levels. MM-100 can block moisture up to 20lbs. MVER or 99% RH.
Coverage: 1000 sq. ft. per unit per coat

NP-230 Non-Porous Substrate Primer 2.5

Zero-VOC, water-based primer for use over non-porous substrates, such as Excelsior™ MM-100, to promote adhesion of cementitious materials, such as the Excelsior™ CP-300 patch and Excelsior™ SU-310 self-leveling underlayment.
Coverage: 1000 sq. ft. per unit

CP-300 Cementitious Patch 10

Cement-based rapid-drying, trowelable patch and skim coat for use prior to interior installation of resilient floor materials. It can be used for minor repairs and flattening or for large skim coat installations. CP-300 allows for flooring installation in as little as 30 minutes, providing a fast and easy solution in urgent or fast-track situations.
Coverage: 1/8" - 33 sq. ft. per bag

SU-310 Self-Leveling Underlayment 50

Premium Calcium Aluminate self-leveling underlayment for use prior to installation of resilient flooring materials. SU-310 can be used to smooth and flatten substrates to prevent telegraphing substrate imperfections through flooring materials. It has a long working time while also offering low shrinkage and excellent leveling properties.
Coverage: Refer to data sheet for coverage chart

FiberMat 41.3" x 249' Roll

Fiber reinforcement web used to improve flexural and tensile strength of the SU-310 prior to installation over unstable substrates. FiberMat binder naturally breaks down during the installation of the SU-310, allowing the fibers to disperse and be distributed throughout the installation.
Coverage: 857 sq. ft. per roll

CSU-400 Cork Sound Control Underlayment 3.5' x 100' x 1.9mm Roll

Rolled sound reduction underlayment designed for indoor use under vinyl flooring. CSU-400 reduces sound transmission from room to room while providing thermal insulation and comfort. It can be installed under glue-down or loose lay flooring options.
Coverage: 350 sq. ft. per roll

FSU-410 Floating Sound Control Underlayment 3.5' x 35' x 2mm Roll

Rolled sound reduction underlayment specifically designed for indoor use under resilient flooring products. FSU-410 can be installed directly over existing floor coverings such as VAT, Sheet Vinyl, Linoleum and Hardwood Flooring, where other adhesives cannot. FSU-410 is a loose lay product that does not require adhesive to be installed and may be used with floating and glue down resilient floors.
Coverage: 122.5 sq. ft. per roll



Maintenance

PRODUCTS

We offer a full line of Excelsior™ maintenance products that will make cleaning and maintaining your flooring simple. Visit flexcofloors.com to see the whole line of maintenance products.



Rubber Tile ASTM Tests and Results

COVERS TEXTURED RUBBER, RADIAL®, RADIAL® II, RADIAL® III, SQUARE², WEAVE, SPEXTONES™, AND EVOLVING STYLES® TILE

Standard Specification

ASTM F1344, Specification for Rubber Floor Tile, Class I, Type A

Durability

ASTM D3389, Abrasion Resistance: Passes, <1 gram lost
ASTM D2240, Hardness (Shore A Durometer): Passes, >85

Resilience

ASTM F925, Resistance to Chemicals: Excellent, list of chemicals available
ASTM F1514 Heat Stability: Passes, flat surface, Delta E<8.0

Slip Resistance

ASTM D2047, Static Coefficient of Friction (Slip Resistance): Excellent, >0.60

Fire Test Data

ASTM E648 (NFPA 253), Critical Radiant Flux: Class 1, >0.45 W/cm²
ASTM E662 (NFPA 258), Smoke Generated by Solid Materials: Passes, <450

Fungi Resistance

ASTM G21, Fungi Resistance: Excellent

FlexTuft® ASTM Tests and Results

FOR VULCANIZED AND NON-VULCANIZED RUBBER BACKING

Fire Test Data

ASTM D2859, Pill Test: Passes and exceeds the minimum char radius of 3" (average char per 8 strips tested = 0.75" radius)

Slip Resistance

ASTM D2047, Static Coefficient of Friction (Slip Resistance): Exceeds 0.80

Tuflex® Force® ASTM Tests and Results

Standard Specifications

ASTM D2240 - Hardness, Shore A; >85

ASTM D3389 - Abrasion Resistance: Passes, <1 gram lost

ASTM D624 - Tear Resistance; 93 +/- 15 lbs/in

ASTM D2047 - Coefficient of Friction; >0.60

ASTM E648 - Critical Radiant Flux, Class I; >0.45 watts per sq cm

ASTM E662 - Smoke Density; <450

Prime Sports™ ASTM Tests and Results

Standard Specifications

ASTM D3389 - Abrasion Resistance: Passes, <1 gram lost
ASTM D2047, Static Coefficient of Friction (Slip Resistance): Exceeds 0.80
ASTM F373 - Thickness Tolerance: +/- 0.015"
ASTM D624 - Die C, Tear Strength: 70ppi
ASTM F137 - Flexibility: Passes - 6mm Mandrel
ASTM F1514 - Resistance to Heat: Delta E: 2.24 and AATCC Gray Scale: 3.85 average

ASTM F925 - Resistance to Chemicals: No Change. Staining Agent List - 5%, Acetic Acid, 70% Isopropyl Alcohol, Mineral Oil, 5% Sodium Hydroxide, 5% Ammonia, Bleach, 5% Phenol, Gasoline, Sulfuric Acid, Kerosene and Olive Oil.

ASTM F970 - Static Load Limit: 250 psi, (modified 400 psi)

ASTM D2240 - Harness Shore A: 60 +/- 5 minutes

ASTM D395B - Compression Set: 12% or less

ASTM D 792 - Density PCF: 65 lbs/cu/ft

Wall Base ASTM Tests and Results

Standard Specifications

ASTM F1861 (Wallflowers), Type TS, Group 1, Styles A and B
ASTM F1861 (Base 2000), Type TP, Group 2, Styles A and B
ASTM F1861 (Vinyl Base), Type TV, Group 1 or 2, Styles A and B
ASTM F1861 (Base Sculptures), Type TP, Group 1 or 2, Style D

Resilience

ASTM F925, Resistance to Chemicals: Passes

ASTM F1515, Light Stability: Excellent

Fire Test Data

ASTM E648 (NFPA 253), Critical Radiant Flux: Class 1, >0.45 W/cm²
ASTM E662 (NFPA 258), Smoke Generated by Solid Materials: Passes <450

Rubber Stair Treads ASTM Tests and Results

Standard Specification

ASTM F2169, Type TS Class 1 & 2; Group 1 & 2 Grade 1

Durability

ASTM F137, Flexibility: Passes, 1/4" mandrel, no breaks or cracks

Resilience

ASTM F925, Resistance to Chemicals: Excellent, list of chemicals available
ASTM F1514 Heat Stability: Passes, flat surface, Delta E<8.0

Fire Test Data

ASTM E648 (NFPA 253), Critical Radiant Flux: Class 1, > 0.45 W/cm²
ASTM E662 (NFPA 258), Smoke Generated by Solid Materials: Passes, <450

Slip Resistance

ASTM D2047, Static Coefficient of Friction (Slip Resistance): Excellent, >0.60 flat surfaces using Neolite sensors

Fungi Resistance

ASTM G21, Fungi Resistance: Excellent

Vinyl Stair Treads ASTM Tests and Results

Standard Specification

ASTM F2169, Type TV

Durability

ASTM F970, Static Load Limit: 250 psi; Modified ASTM F970: 650 psi
ASTM D3389, Abrasion Resistance: Passes, <1 gram lost
ASTM F137, Flexibility: Passes, bend around a 1" mandrel, no breaks or cracks

Resilience

ASTM F925, Resistance to Chemicals: Excellent, list of chemicals available
ASTM F1515, Light Stability: Passes, flat surface, Delta E < 8.0

Fire Test Data

ASTM E648 (NFPA 253), Critical Radiant Flux: Class 1, >0.45 W/cm²
ASTM E662 (NFPA 258), Smoke Generated By Solid Materials: Passes, <450

Slip Resistance

ASTM D2047, Static Coefficient of Friction (Slip Resistance): Excellent, >0.60

ESD Rubber Tile ASTM Tests and Results

Standard Specification

ASTM F1344, Specification for Rubber Floor Tile, Class I, Type A

Durability

ASTM F970, Static Load Limit: 250 psi; Modified ASTM F970: 1100 psi; Passes
ASTM F137, Flexibility: Passes, bend around a 1/4" mandrel, no breaks or cracks

ASTM D2240, Hardness (Shore A Durometer): Passes, >85

Electrical Resistance

ASTM F150, Electrical Resistance for Resilient Flooring; 1 x 10² to 1 x 10³

Resilience

ASTM F925, Resistance to Chemicals: Excellent, list of chemicals available

Slip Resistance

ASTM D2047, Static Coefficient of Friction (Slip Resistance): Excellent, >0.60

Fire Test Data

ASTM E648 (NFPA 253), Critical Radiant Flux: Class 1, >0.45 W/cm²
ASTM E662 (NFPA 258), Smoke Generated by Solid Materials: Passes, <450

Fungi Resistance

ASTM G21, Fungi Resistance: Excellent

Delane® ESD Vinyl Tile ASTM Tests and Results

Standard Specification

ASTM F1700 - Specification for Solid Vinyl Tile; Class I, Type A

Durability

ASTM F970 - Static Load Limit; 250 PSI; Modified ASTM F970, 2500 PSI

Electrical Resistance

Chemical Resistance

All FLEXCO® products (except FlexTuft®) were tested for resistance to various chemicals by placing one cubic centimeter of each chemical on the tile surface and then covering it with a watch glass. The chemicals were allowed to remain in contact with the tile for one hour and for 24 hours. Tiles were then washed with soap and water and allowed to dry under room conditions for 24 hours. Visual evaluations were then made and classified as follows:

No change = Chemical had no visible effect upon the tile or the effect would be eliminated in the course of ordinary maintenance

Surface dulling = Tile suffered loss of gloss

Surface attack = Tile suffered damage such as warping, swelling, blistering, peeling and raised or roughened areas

Stain = Tile discoloration

ASTM F150 - Electrical Resistance; • Conductive, 2.5 x 10⁴ to 1 x 10⁶ • Static Dissipative, 1 x 10⁶ to 1 x 10⁸ • ANSI/ESD S7.1, NFPA 99

Resilience

ASTM F925 - Resistance to Chemicals; Passes, List of chemicals available

ASTM F1515 - Light Stability; Passes

Slip Resistance

ASTM D2047 - Static Coefficient of Friction (Slip Resistance); >0.60; dry

Fire Test Data

ASTM E648 (NFPA 253) - Critical Radiant Flux; Class 1, >0.45 W/cm²

ASTM E662 (NFPA 258) - Specific Optical Density of Smoke Generated by Solid Materials; Passes, <450

Natural Elements Premium Luxury Vinyl Tile Wood and Natural Elements Premium Luxury Vinyl Tile Stone ASTM Tests and Results

Standard Specification

ASTM F1700, Specification for Solid Vinyl Tile: Class III, Type B

Fire Test Data

ASTM E648 (NFPA 253) - Critical Radiant Flux; Class 1, >0.45 W/cm²
ASTM E662, Smoke Density; Passes

Durability

ASTM F970, Static Load Limit: 250 psi; Modified ASTM F970: 2000 psi

Resilience

ASTM F925, Resistance to Chemicals: Excellent, list of chemicals available

ASTM F1515, Light Stability: Passes, flat surface, Delta E < 8.0

Slip Resistance

ASTM D2047 - Static Coefficient of Friction (Slip Resistance); >0.60; dry

Solid Vinyl Tile ASTM Tests and Results

COVERS DELANE® AND GEODESY® TILE

Standard Specification

ASTM F1700, Specification for Solid Vinyl Tile: Class 1, Type A; Federal Specification SS-T-312B, Type III

Durability

ASTM F970, Static Load Limit: 250 psi; Modified ASTM F970: 2500 psi

Resilience

ASTM F925, Resistance to Chemicals: Excellent, list of chemicals available

ASTM F1515, Light Stability: Passes, flat surface, Delta E < 8.0

Fire Test Data

ASTM E648 (NFPA 253), Critical Radiant Flux: Class 1, >0.45 W/cm²
ASTM E662 (NFPA 258), Smoke Generated By Solid Materials: Passes, < 450

Slip Resistance

ASTM D2047, Static Coefficient of Friction (Slip Resistance): Excellent, >0.60

Chemical	1 Hour	24 hours	Chemical	1 Hour	24 hours
Acids			Xylene	No change	Slight surface attack
Sulfuric Acid (Conc.)	No change	Light purple brown stain, surface dulling	Cresol	No change	Surface attack
			Gasoline (Unleaded)	Slight change	Surface attack
Sulfuric Acid (77%)	No change	Light yellow stain, surface dulling	Mineral Oil*	Slight change	Surface attack
			Carbon Tetrachloride	No change	Slight surface attack
Sulfuric Acid (5%)	No change	No change	Chloroform	No change	Very slight surface attack
Nitric Acid (Conc.)	No change	Surface dulling			
Nitric Acid (5%)	No change	Slight surface attack	Trichlorethylene**	Very slight surface attack	Slight surface attack
Hydrochloric Acid (Conc.)	No change	No change			
Hydrochloric Acid (5%)	No change	Slight surface attack	Ketones/Esters		
Hydrofluoric Acid (Conc.)	No change	No change	Acetone	Very slight surface attack	Surface attack
Hydrofluoric Acid (5%)	No change	No change			
Acetic Acid (Conc.)	No change	Slight surface attack	Methyl Ethyl Ketone	Very slight surface attack	Surface attack
Acetic Acid (5%)	No change	No change			
Alcohols			Amyl Acetate	No change	Surface attack
Isopropyl Alcohol (70%)	No change	No change	Ethyl Acetate	No change	Surface attack
Methyl Alcohol	No change	No change			
Ethyl Alcohol	No change	No change	Miscellaneous		
Butyl Alcohol	No change	Slight surface attack	Silver Nitrate (5%)	No change	Brown/black stain
			Ethyl Ether	No change	Very slight surface attack
Alkalies					
Sodium Hydroxide (5%)	No change	No change	Formaldehyde (40%)	No change	No change
Ammonium Hydroxide (28%)	No change	No change	Creosote	Yellow stain	Dark brown stain, surface attack
Aromatics			Thimerosal	No change	Pink stain
Phenol	No change	Slight surface attack	Iodine	No change	Dark yellow stain
Benzene	No change	Slight surface attack	Bleach (5.25% NaOCl)	No change	No change

* Rubber tile subject to surface attack at 24 hours.

** Rubber tile not affected.



Xpress

F L O O R I N G O P T I O N S

Our Xpress Ship flooring options provide expedited delivery of **six of our most popular products in eight colors.** Choose from coordinated wall base, tile and stair tread options that provide the products you need and the service you want. Daily stock means fast delivery to keep your installation on schedule.


Xpress ship daily stock availability

Wallflowers® Premium Wall Base	4" x 48"	30 pcs per box	250 cartons per color in stock daily
Base 2000™ Wall Base	4" x 48"	30 pcs per box	250 cartons per color in stock daily
Radial® RBT Tile	18" x 18"	20 pcs per carton	3,000 square feet per color in stock daily
Hammered Tile	18" x 18"	20 pcs per carton	1,000 square feet per color in stock daily
Radial® 550 Treads	48"	6 pcs per carton	200 pieces per color in stock daily
Hammered 1900	48"	6 pcs per carton	50 pieces per color in stock daily

Sample Requests

R U B B E R + V I N Y L

FLEXCO® has a variety of sampling kits and chain sets available to assist with making your flooring, wall base and accessory selections. FLEXCO® offers custom color matching for several of our products and custom cutting to help you bring your design vision to life. Contact customer service at 1.800.633.3151 or submit your request online at flexcofloors.com. You may also email your sample request to samples@flexcofloors.com.

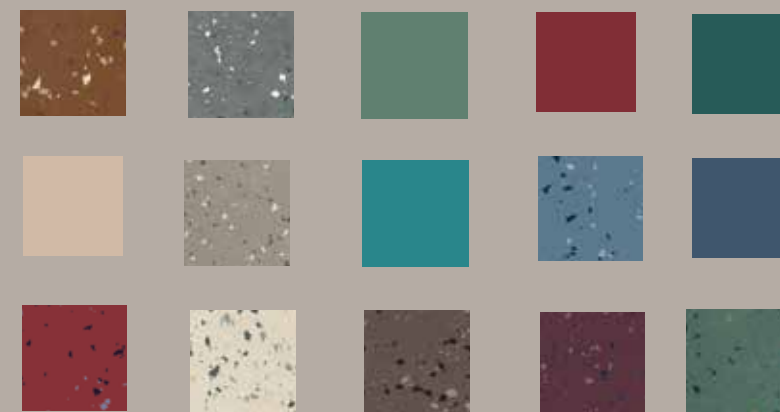

IMPACT

PROGRAM



S

ustainability is at the heart of FLEXCO manufacturing from sourcing to processing to recycling. IMPACT is a proven recycling program that recycles flooring for alternate uses at the end of the product life cycle. We will help you collect flooring, arrange for its take-back, and find new uses that will divert it from landfills and oceans.

How the IMPACT Take-Back Program Works:

1. Contact Marcus Hyde to participate in our IMPACT program. Call 1-800-862-7539, ext. 7224, or email impact@flexcofloors.com. We will ship a Gaylord collection container to your site for your qualified flooring materials for recycling.
2. Provide reporting information. Include the project name, location and contact information for sustainability reporting.
3. Secure return freight payment in advance. Once you are ready to recycle, contact a shipper to return your container to FLEXCO. You may use your own method for shipping, however it must be prepaid.
4. Return your container to FLEXCO. We will take care of the rest. Recycled flooring is then repurposed as new flooring and other practical products.

The Upcycle Impact

Responsible. Resourceful. Recyclable.



The Downcycle Impact

Replace. Reclaim. Repurpose.



Affiliations & Certifications

- > AIA, ASID and IIDA Industry Partner
- > Certified Installation Manager Program
- > Coast Guard and International Maritime Organization (IMO) certified products
- > Member of the U.S. Green Building Council
- > Floor Covering Installation Contractors Association
- > The Construction Specifications Institute
- > World Floor Covering Association
- > National Association of Floor Covering Distributors
- > American Public Transit Association
- > ESD Association
- > ASTM Committee
- > Floor Covering Installers of North America
- > International Facility Management Association
- > International Standards and Training Alliance of Floor Covering Professionals (INSTALL)
- > Resilient Floor Covering Institute
- > Color Marketing Group
- > CHPS Standards
- > FloorScore®
- > Tuscumbia, AL Manufacturing Facility
ISO 14001:2015 Certified

flexcofloors.com

1.800.633.3151 + Fax: 1.800.346.9075
1401 East 6th Street + Tuscumbia, AL 35674

