

FLEXCO®

FLOORING SYSTEMS FOR
healthcare



**9 new natural elements
wood colors and 8 new
stone colors in 12" x 24"**


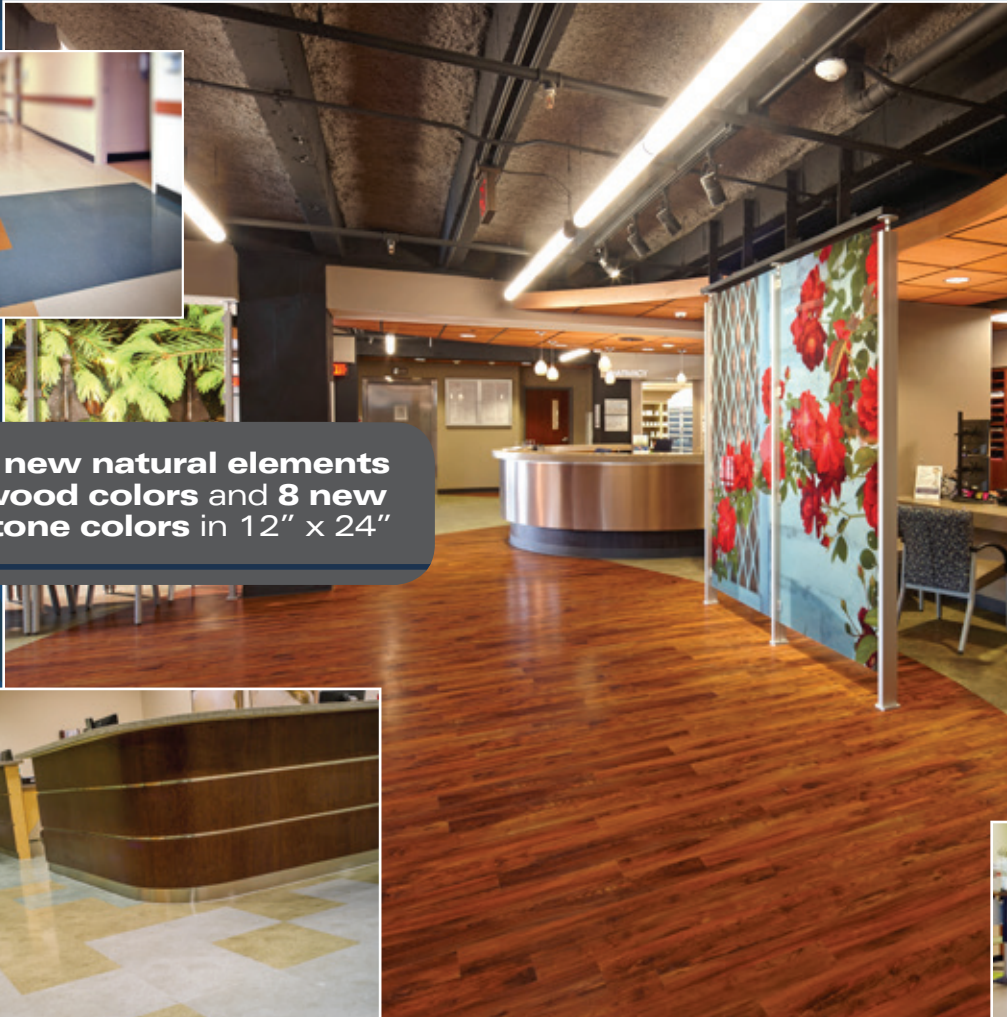


Photo courtesy of JRA Architects, Louisville, KY



FLEXCO®
innovative design. flooring performance.

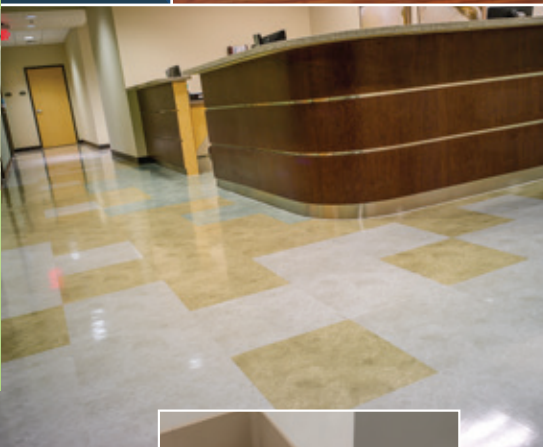

CONTINENTAL
FLOORING COMPANY

800-825-1221

www.continentalflooring.com

distinct designs

RUBBER TILE & TREAD

FLEXCO
5
TOP




- > PVC free rubber tile, sheet and tread
- > Natural resistance to bacteria and fungi in accordance with ASTM G 21
- > Homogeneous color
- > Quiet and extremely comfortable walking surface
- > Low maintenance, no waxing required



spextones®

flextones®

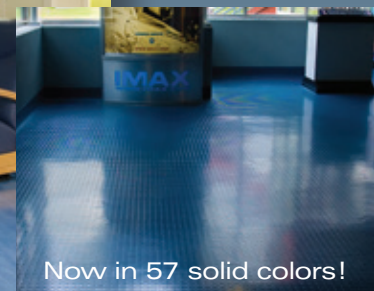

Now in 57 solid colors!



evolving
styles®

natural elements

VINYL WOOD PLANK AND VINYL STONE TILE

FLEXCO
5
TOP



- > 1/8" gauge, 4" x 36" and 6" x 48" vinyl plank or 18" x 18" and 12" x 24" vinyl stone tile
- > Urethane ceramic bead finish reduces potential for scratches; no waxing required
- > 100% pure virgin material
- > Resists bacteria growth
- > Over 50% of raw materials are sourced within a 100 mile radius of our manufacturing facility



base sculptures™

WALL BASE SYSTEM

FLEXCO
5
TOP




SCS Certified
National 2017 Flooring Environment



- > Type TP, thermoplastic rubber
- > 40' seamless rolls available in 3 profiles for seamless installations; 10 other profiles in 8' lengths
- > Color coordinated inside and outside corner blocks
- > FlexOne pricing
- > Paintable surface for infinite color possibilities

**fast
7-10 day
lead
times!**

Plus 5 new
profiles and
expanded
color palette!

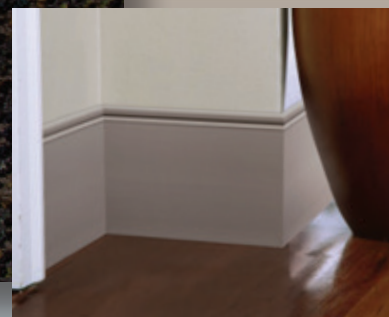

health design™

WALL BASE



FLEXCO
5
TOP



SCS Certified
National 2017 Flooring Environment



- > Type TP, thermoplastic rubber
- > Available in 6' lengths
- > 1/8" tapers to .080" gauge for use with multiple types of flooring
- > 6" Height for better protection of wall surfaces
- > Heat-weldable for seamless floor installation

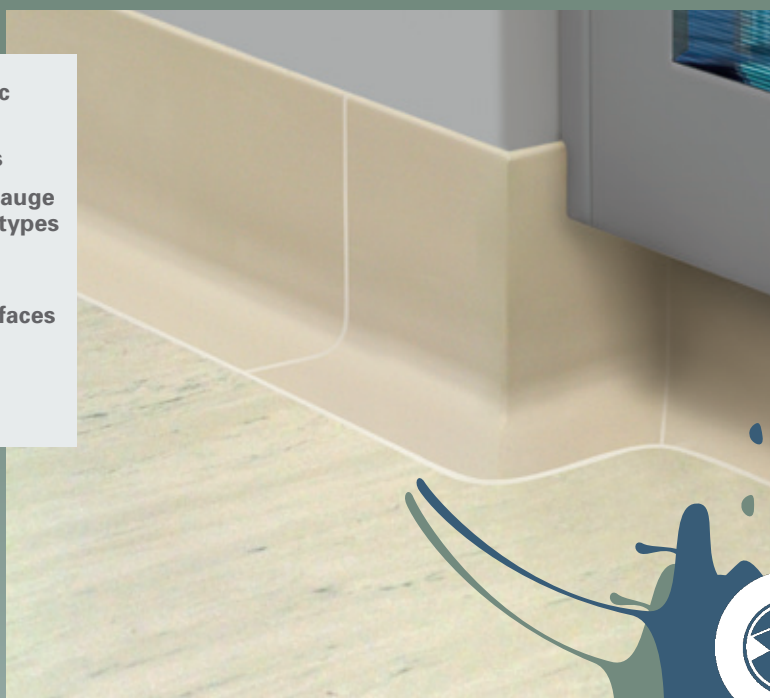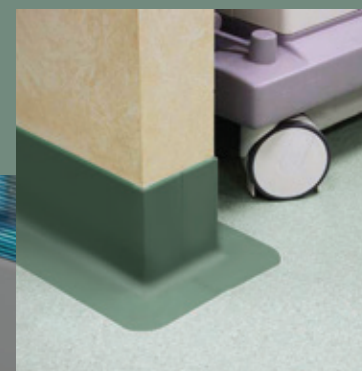

CONTINENTAL
FLOORING COMPANY

800-825-1221 www.continentalflooring.com

delane™ esd vinyl + solid vinyl TILE

FLEXCO®
5
TOP



- > 1/8" gauge in various sizes
- > Easily buffs to a shine, no waxing required
- > Unlike competitive ESD products, no waxing required to maintain static dissipative qualities
- > May be seamlessly installed by heat welding
- > Flexible for quick and easy flash coving



esd vinyl

A combination of conductive tile and proper conductive footwear keeps body voltage less than 8 volts. The electrical range for our Conductive Tile is 2.5×10^4 to 1.0×10^6 . The electrical range for our Static Dissipative tile is 1.0×10^6 to 1.0×10^8 .

12 new
delane™
colors



nature-friendly PRODUCTS



At FLEXCO®, we believe responsible manufacturing goes hand in hand with environmental stewardship. That's why we are active participants in the U.S. Green Building Council's LEED® (Leadership in Energy and Environmental Design) program – a voluntary, consensus-based rating system for calculating the life-cycle impact of any building on the environment.



800-825-1221

www.continentalflooring.com

©2016 FLEXCO®